

MULTI SPLIT



R32 INDOOR / OUTDOOR UNITS

		○ Single Only	● Multi Only	○● Compatible with Residential Single Split	○◎ Compatible with Commercial Single Split				
kBtu/h		5	7	9	12	15	18	24	
kW		1.5	2.1	2.6	3.5	4.2	5.3	7.0	
Wall Mounted	ARTCOOL Gallery				MA09R NF1	MA12R NF1			
	ARTCOOL Mirror			AM07BH NSJ	○● AC09BH NSJ	○● AC12BH NSJ			
	Air - Purification				○● AP09RT NSJ	○● AP12RT NSJ			
	Deluxe			● DM07RH NSJ	○● DC09RH NSJ	○● DC12RH NSJ			
	Standard Plus		● PM05SP NSA	● PM07SP NSA	○● PC09SQ NSJ	○● PC12SQ NSJ	● PM15SP NSJ	○● PC18SQ NSK	○● PC24SQ NSK
	Standard 2		● MJ05PC NSJ	● MJ07PC NSJ	○○ MJ09PC NSJ	○○ MJ12PC NSJ	● MJ15PC NSJ	○○ MJ18PC NSK	○○ MJ24PC NSK
	1 Way Cassette			● MS07ET NSA	○● S09ET NSJ	○● S12ET NSJ			
Ceiling Mounted Cassette	4 Way Cassette		● MT06R NRO	● MT08R NRO	○○ CT09F NRO	○○ CT12F NRO		○○ CT18F NQO	○○ CT24F NBO
	Mid / High Static Pressure							○○ CM18F N10	○○ CM24F N10
	Ceiling Concealed Duct				○○ CL09F N50	○○ CL12F N50		○○ CL18F N60	
	Low Static Pressure							○○ CL24F N30	
kBtu/h	14	16	18	21	24	27	30		
kW	4.1	4.7	5.3	6.2	7.0	7.9	8.8		
Multi			MU3R19 U21 3-port	MU3R21 U21 3-port	MU4R25 U21 4-port	MU4R27 U40 4-port	MU5R30 U40 5-port		

※ All indoor units are compatible with R410A outdoor units.

R410A INDOOR / OUTDOOR UNITS

	5	7	9	12	15	18	24
kBtu/h	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Console				● CQ09 NAO	● CQ12 NAO		● CQ18 NAO
kBtu/h	40	48	56				
kW	11.7	14.1	16.4				
Multi Piping							
Distribution Box			FM48AH U34 / FM49AH U34 8-IDU	FM56AH U34 / FM57AH U34 9-IDU			

REFRIGERANT	R32							R410A		
TYPE	MULTI PIPING							DB BOX TYPE		
kBtu/h	14	16	18	21	24	27	30	40	48	56
kW	4.1	4.7	5.3	6.2	7.0	7.9	8.8	11.7	14.1	16.4
BLDC Comp & Fan Motor	●	●	●	●	●	●	●	●	●	●
Eurovent Certification	●	●	●	●	●	●	●	●	●	●
Variable Voltage Control			●	●	●	●	●	●	●	●
Wide Louver Plus Fin	●	●	●	●	●	●	●	●	●	●
Optimized Heat Exchanger Path	●	●	●	●	●	●	●	●	●	●
Power Saving Start up			●	●	●	●	●	●	●	●
Peak Current Control	●	●	●	●	●	●	●	●	●	●
Standby Mode	●	●	●	●	●	●	●	●	●	●
Mode Lock	●	●	●	●	●	●	●	●	●	●
R1 Compressor								●	●	●
Twin Rotary Compressor	●	●	●	●	●	●	●			
Smart Sensor Pressure Control			●	●	●	●	●	●	●	●
Black Fin Heat Exchanger	●	●	●	●	●	●	●	●	●	●
Fast Cooling & Heating			●	●	●	●	●	●	●	●
Night Silent Operation	●	●	●	●	●	●	●	●	●	●
Wiring Error Check	●	●	●	●	●	●	●	●	●	●
LG MV	●	●	●	●	●	●	●	●	●	●
PI-485 Connection			●	●	●	●	●	●	●	●
Forced Cooling Operation	●	●	●	●	●	●	●	●	●	●

KEY FEATURES

PERFECT SOLUTION FOR MULTIPLE ROOMS



Energy Efficiency | Extreme Durability | Comfort and Convenience

LG's Multi Split system provides powerful, efficient cooling and heating with two, three, four, or up to nine indoor units operating from a single outdoor unit. LG's advanced inverter technology offers powerful performance while consuming less energy and floor space than that of individual single split systems.



ENERGY EFFICIENCY

ENERGY EFFICIENCY A+++ / A+

The advanced technologies of LG achieve the lowest energy consumption, especially SEER value regarding ErP regulation.


	4.1	4.7	5.3	6.2	7.0	7.9	8.8
kW	8.5	7.8	8.5	8.5	8.0	8.0	8.2
SEER	A+++	A++	A+++	A+++	A++	A++	A++
SCOP	4.2	4.2	4.4	4.4	4.4	4.2	4.2
	A+	A+	A+	A+	A+	A+	A+

- BLDC Inverter Twin Rotary Compressor
- Enhanced Heat Exchanger
- Smart Load Control
- Peak current control


Powerful Brushless Direct Current Motor (BLDC) Compressor

LG air conditioners are equipped with a BLDC Inverter Twin Rotary Compressor that uses a neodymium magnetic core. The compressor has high efficiency and superior reliability, because it is excellent in controlling the operating speed depending on the load. With improved efficiency as compared to standard AC inverter products, this compressor is optimized for outdoor load changes and seasonal efficiency.

Operation Range

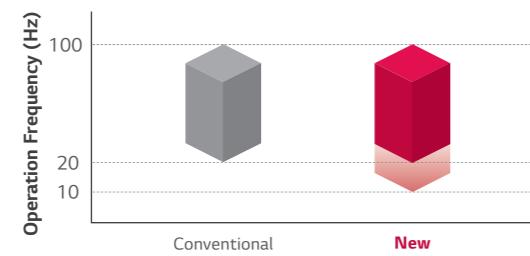

Motor Efficiency


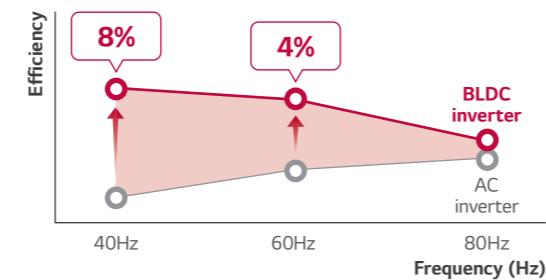


Enhanced Heat Exchange

Wide Louver Plus fin technology increases 11% of full load heating performance and 6% of COP compared to conventional fin. It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

Heating Operation at Defrost Condition


It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

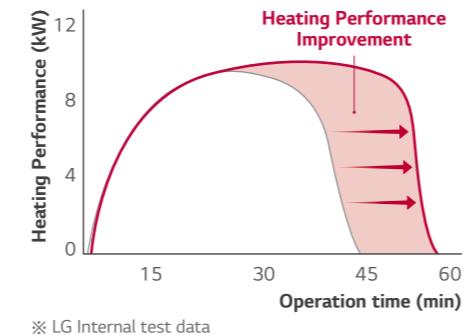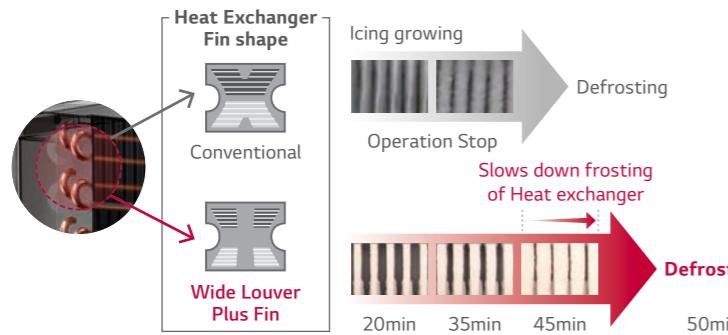


Power Saving Start Up

LG commercial air conditioners will automatically alter the temperature of discharge air by controlling their refrigerant temperature based on the difference between the indoor temperature and the target indoor temperature. During cooling operation, evaporating temperature will increase if the temperature difference reduces. This allows for enhanced comfort and reduced energy consumption.

Comfortable Indoor Air

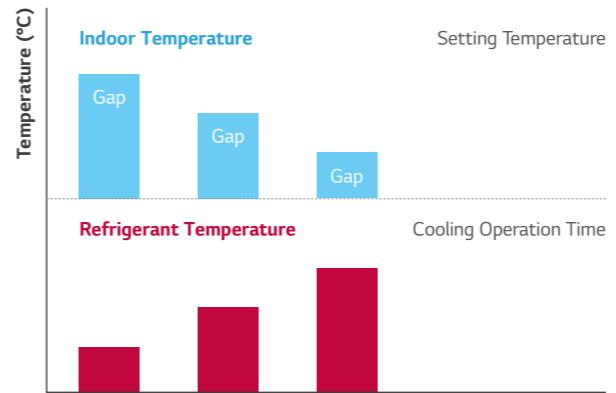


Energy Saving

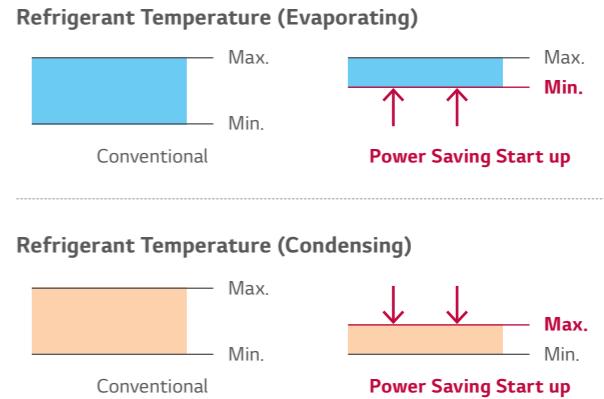

Mode Lock

Set the operation mode to either cooling-only or heating-only, either by adjusting the wired remote controller or setting the DIP switch to avoid combined use of cooling and heating. (Some models need wired remote controller for mode lock function according to feature overview table)

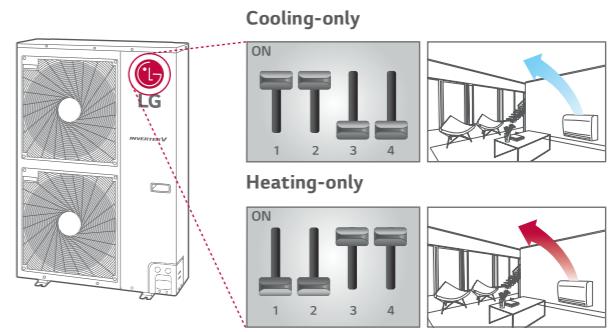


Peak Current Control

The peak current control function keeps the air conditioner from running at the maximum level while maintaining current system setting, in order to reduce energy consumption. This function allows for reduced energy costs during the peak energy use periods when energy fees are higher.



How to set dip switch

STEP 1
Max. power consumption : 1.9 kW

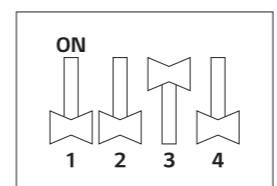

※ Full Load consumption : 2.5kW
※ 7.0kW model
※ LG Internal test result

STEP 2
Max. power consumption : 1.7 kW

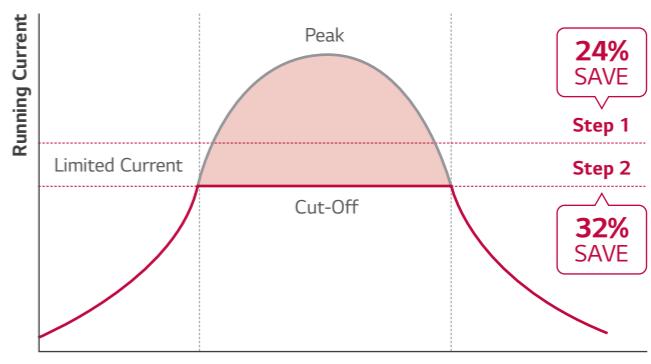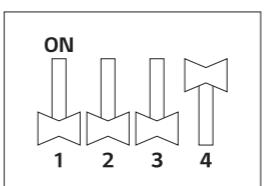

※ When using Peak current control, the cooling capacity may not be sufficient.
※ 7.0kW model ※ LG Internal test result

EXTREME DURABILITY




EXTREME DURABILITY

Product safety and Durability are assisted by advanced BLDC Inverter Twin Rotary compressor, Smart sensor, and Black Fin Heat Exchanger.

Improved BLDC Inverter Dual Inverter Compressor


Parts of BLDC Inverter Twin Rotary Compressor have been improved to allow a longer life span.

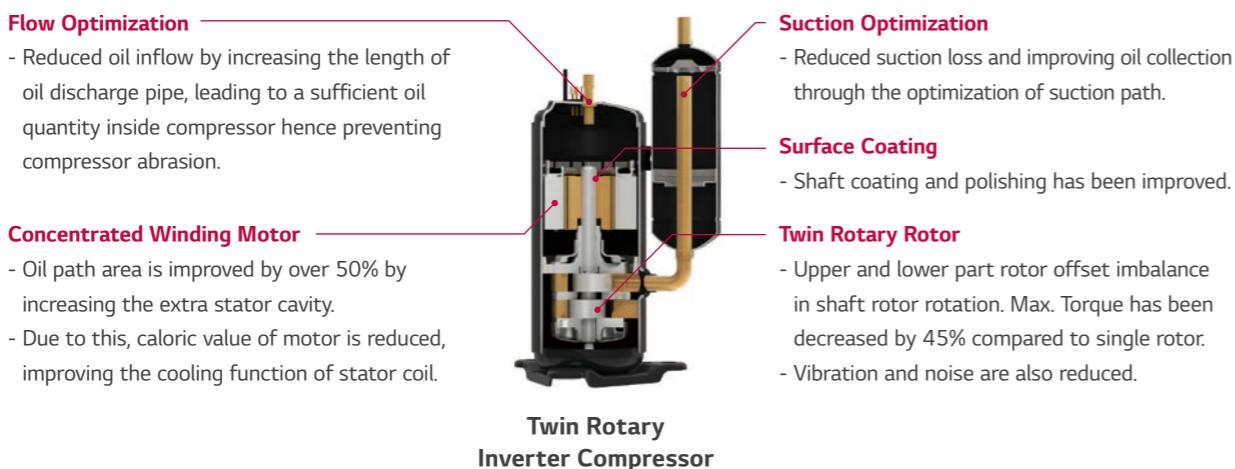


Pressure Control Technology by Smart Sensor

Quicker and more reliable operation made possible by pressure control technology.

Field Failure Rate of Outdoor Unit

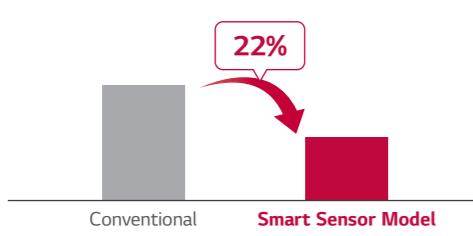


※ LG Internal result
※ FFR Period : 2 years before / after applying pressure sensor

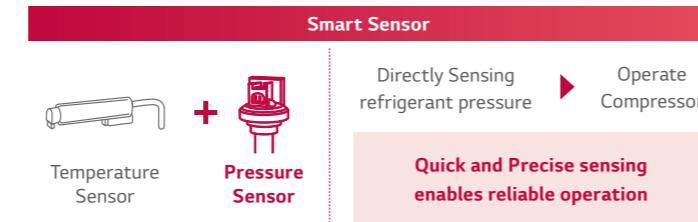

Corrosion Resistance Black Fin

The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollution including fumes from factories.


Longer Lifespan, Lower Maintenance Costs

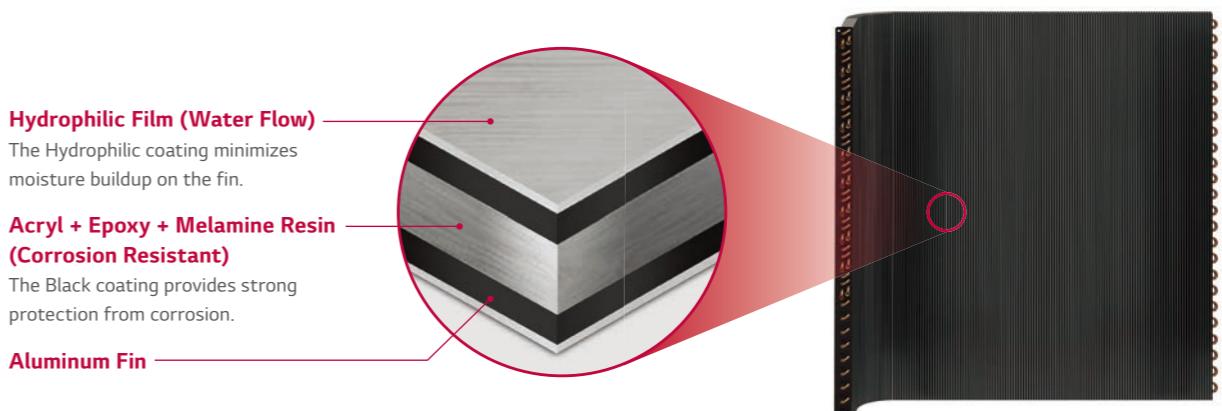

※ Product is not fully treated for anti-corrosion.
To install near the sea, additional treatment must be required.

SST (Salt Spray Test)


Test Process

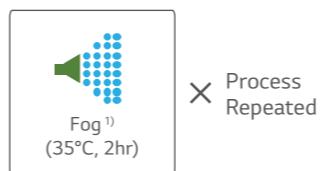

Test process is conducted according to ISO 9227.
1) Salty water concentration : NaCl aqueous solution (5%)



CCT (Cyclic Corrosion Test)

Test Process


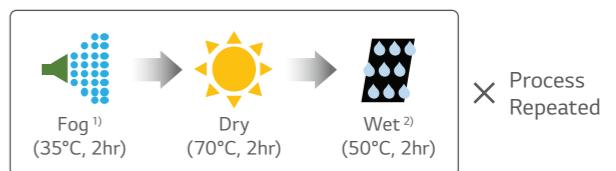


Test process is conducted according to ISO 14933.
1) Salty water concentration : NaCl aqueous solution (5%)
※ Dry condition changed : 60°C, 4hr → 70°C, 2hr
2) Deionized water

Test Result (5% Area of defects compared to initial)

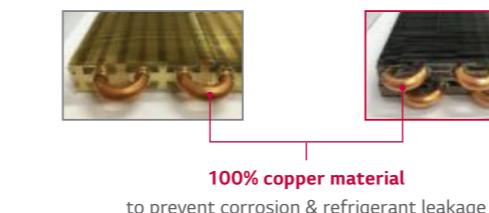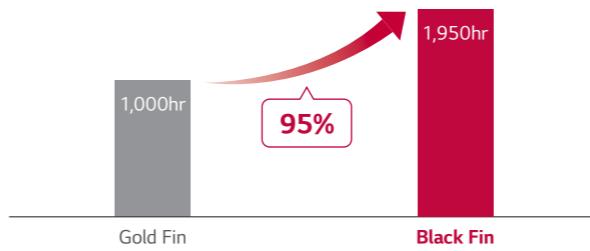

Test Result (5% Area of defects compared to initial)

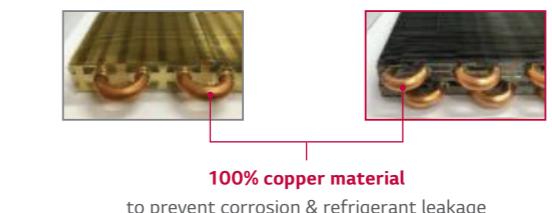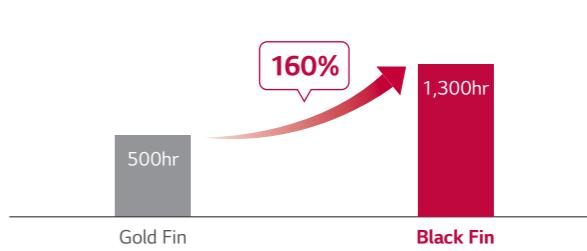

EXTREME DURABILITY

R1 Compressor



* LG Internal test result, Based on single split 10 kW Cassette
** LG Internal test result, Based on conventional compressor (Rotary type GPT442M)
※ R1 Compressor application ※ Model : 40-56k (7 models)




COMFORT & CONVENIENCE

Revolutionary Scroll Compressor


Revolutionary Scroll Compressor is applied for high-efficiency and reliability. This type of compressor is more advanced compared to the conventional one. Especially tilting motion of scroll has been improved. Further, the operation range is improved compared to the conventional type.

- Scroll compressor with simple structure
 - High efficiency (Low load at low speed / total efficiency)
 - Low noise (High speed possible)
 - Improved Tilting Motion of scroll
 - 20% weight reduction (vs. Conventional compressor)
- ※ Applied Model : 40-56k (7 models)

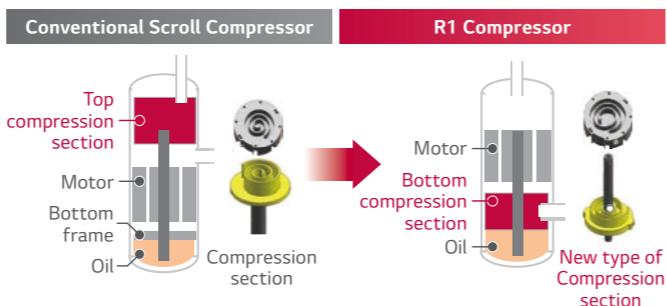


Seasonal energy efficiency

SEER 22%, SCOP 5% improvement (vs. Rotary)
※ Multi 40k

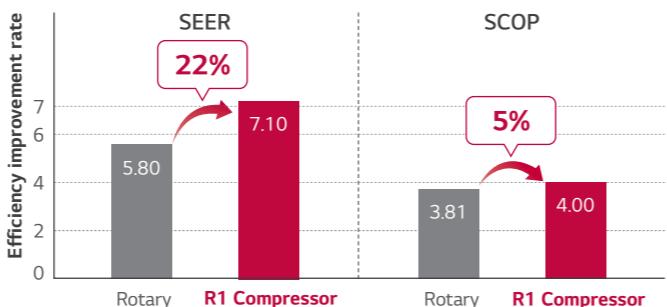

Wide Operation Range


- Optimized for various cooling & heat load operation
- World best compressor speed (Up to 150 Hz)
- Optimized for even low load operation (Down to 10 Hz) (Efficiency increases / Improved comfort)

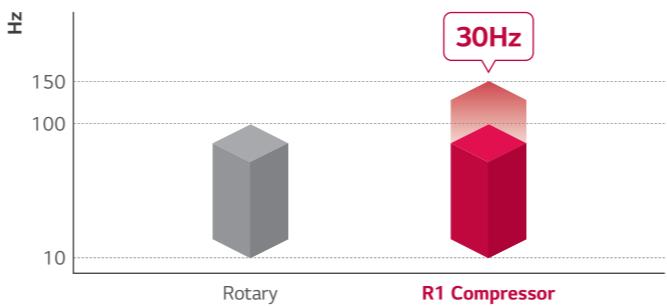

Fast Cooling & Heating


Pressure control takes less time to reach the desired temperature up to 30% in cooling and 44% in heating with high level of accuracy and stability.

Cooling

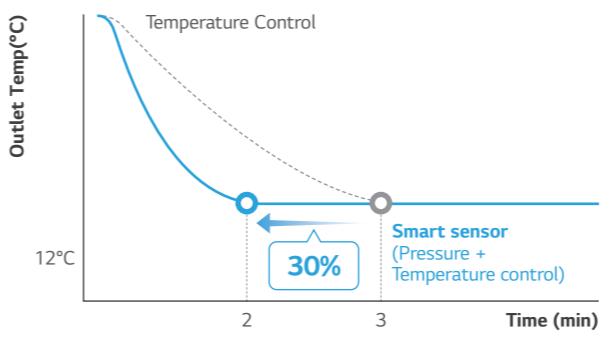

※ LG Internal test result



Heating

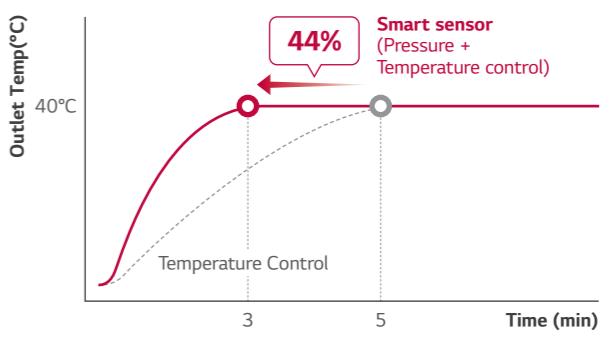

Night Silent Operation

Night Silent Operation can reduce noise levels at night time by simply setting the dip switch on the PCB of the outdoor unit.

Cooling Mode

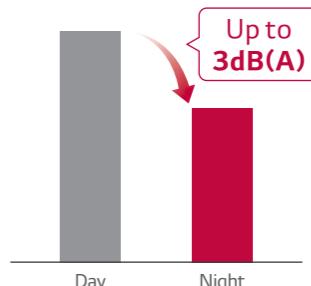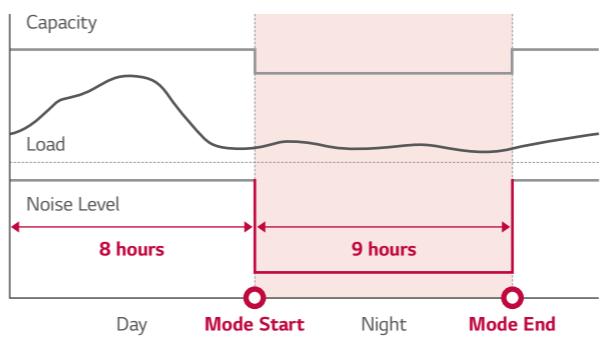


※ This function is only available for Cooling Mode.
※ If you want to stop the Night Quiet Mode, Change the Dip Switch.

COMFORT & CONVENIENCE

COMFORT & CONVENIENCE


Wiring Error Check

Installers can check whether the transmission cable has been connected correctly by using the wiring error check function. The wiring error check function can reduce the time taken to check for transmission cable errors.

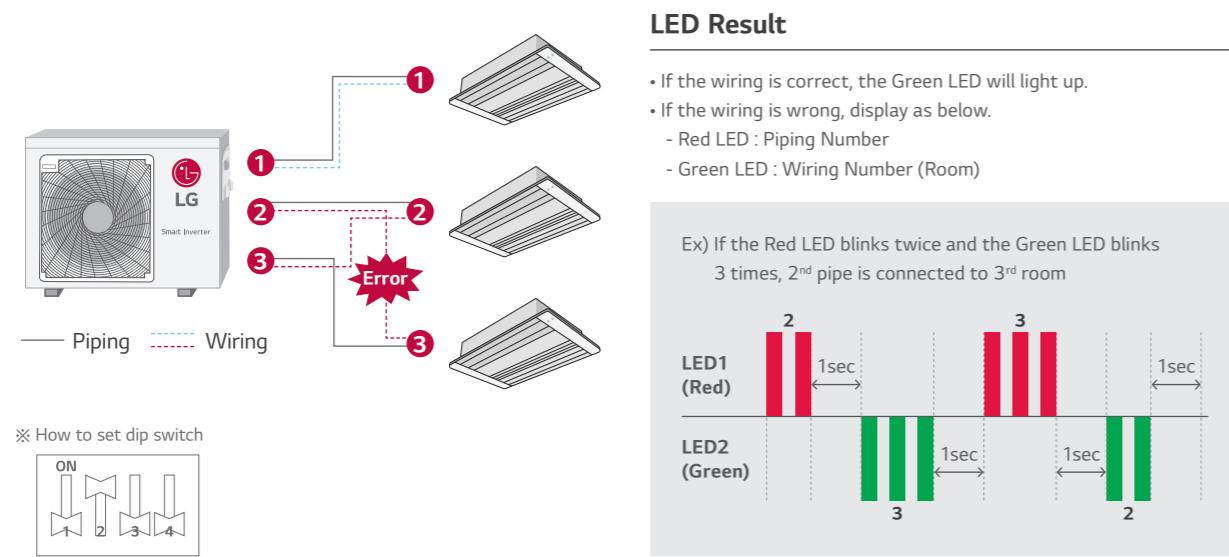

Forced Cooling Operation


The forced cooling operation allows refrigerant to be recharged or pumped down, regardless of the indoor temperature. More importantly this function can be used when indoor units are being moved or repaired.

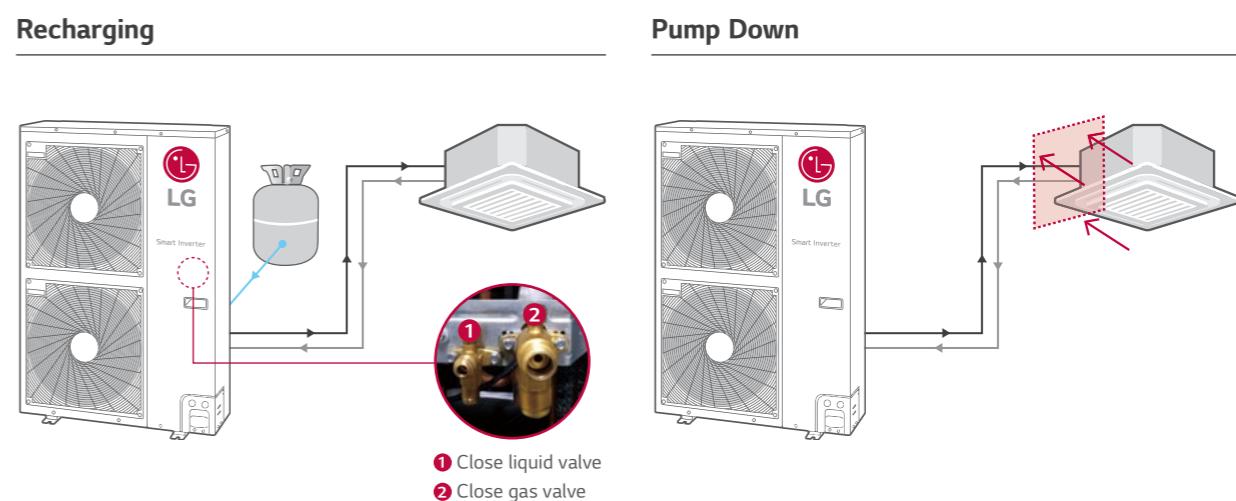


Advanced Grille & Fan

The improved grille shape design on the outdoor unit helps to distribute air more efficiently which improves heat exchange and reduces the noise level. The new axial Fan has a thick front edge and a smooth rear edge, thus providing not only high efficiency, low noise, wide fan, but also improving the air flow rate.


Grille

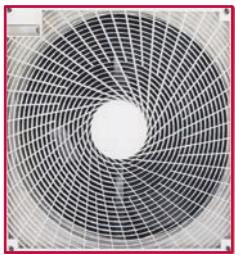

Fan Type 1


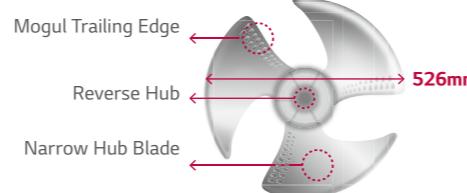


Fan Type 2

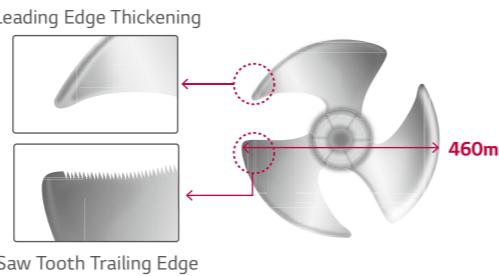

LG MV (Monitoring View)

LG MV helps engineers to inspect and monitor air conditioning units easily.

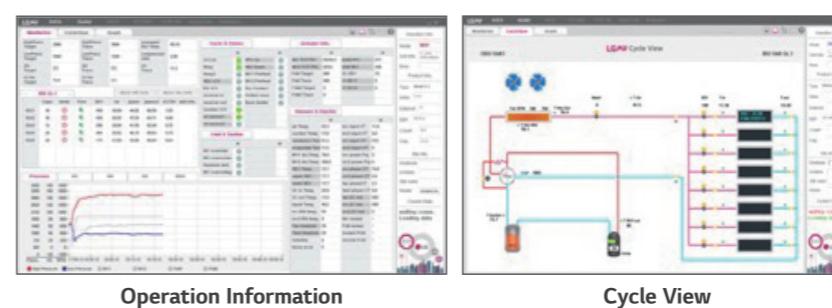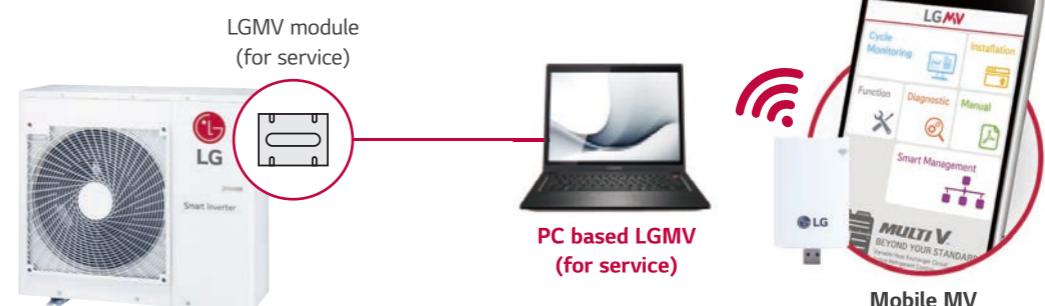

- IDU & ODU Information
- Cycle & Valves
- Sensors & Electricity
- Cycle Diagram
- Actuator Information

OUTDOOR UNITS

R32

MULTI SPLIT



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

OUTDOOR UNITS		MU2R15 ULO	MU2R17 ULO
Compressor	Type	Twin Rotary	Twin Rotary
Capacity*	Cooling Min. / Nom. / Max. kW	0.9 / 4.1 / 4.7	0.9 / 4.7 / 5.4
	Heating Min. / Nom. / Max. kW	1.0 / 4.7 / 5.4	1.0 / 5.3 / 5.7
Low Temperature Capacity	Heating -7°C Max. kW	3.3	3.7
Power Input*	Cooling Min. / Nom. / Max. kW	0.2 / 1.0 / 1.4	0.2 / 1.3 / 1.7
	Heating Min. / Nom. / Max. kW	0.2 / 1.1 / 1.4	0.2 / 1.3 / 1.6
Running Current	Cooling Min. / Nom. / Max. A	1.1 / 4.6 / 6.4	1.1 / 5.6 / 7.9
	Heating Min. / Nom. / Max. A	1.1 / 4.9 / 6.6	1.1 / 5.5 / 7.6
EER		4.14	3.75
COP		4.38	4.22
SEER		8.50	7.80
SCOP		4.20	4.20
Pdesign (@-10°C)		kW	4.10
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)	A+++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	169 / 1,367	210 / 1,367
Airflow Rate	Nom. m³/min	28.2	28.2
Sound Pressure	Cooling Nom. dB(A)	48	48
	Heating Nom. dB(A)	51	51
Sound Power	Cooling Max. dB(A)	61	63
Dimensions	W x H x D mm	770 x 545 x 288	770 x 545 x 288
Net Weight	Kg	36	36
	Type	R32	R32
Refrigerant	Charge Kg	1.1	1.1
	Additional Charge g/m	20	20
	GWP	675	675
	t-CO ₂ eq	0.743	0.743
Operation Range (Outdoor)	Cooling Min. / Max. °C DB	-10 / 48	-10 / 48
	Heating Min. / Max. °C WB	-18 / 18	-18 / 18
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	No. x mm ²	3C x 2.5	3C x 2.5
Transmission Cable	No. x mm ²	4C x 0.75	4C x 0.75
Circuit Breaker	A	15	15
Piping Length Total	m	30	30
Piping Length per Branch	Max. m	20	20
Piping Elevation Difference	IDU - ODU Max. m	15	15
	IDU - IDU Max. m	7.5	7.5
Piping Connection	Liquid mm (inch) x No.	Ø6.35 (1/4) x 2	Ø6.35 (1/4) x 2
	Gas mm (inch) x No.	Ø9.52 (3/8) x 2	Ø9.52 (3/8) x 2

Notes :

1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. * : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected

5. Minimum combination ratio should be more than 40%.

6. This product contains fluorinated greenhouse gases (R32)

OUTDOOR UNITS



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

OUTDOOR UNITS		MU3R19 U21	MU3R21 U21	MU4R25 U21	
Compressor	Type	Twin Rotary	Twin Rotary	Twin Rotary	
Cooling	Min. / Nom. / Max. kW	1.1 / 5.3 / 6.3	1.1 / 6.2 / 7.3	1.1 / 7.0 / 8.5	
Capacity*	Heating	Min. / Nom. / Max. kW	1.2 / 6.3 / 7.3	1.2 / 7.0 / 7.8	1.2 / 8.1 / 9.1
Low Temperature Capacity	Heating -7°C Max.	kW	5.2	5.5	5.9
Power Input*	Cooling	Min. / Nom. / Max. kW	0.3 / 1.1 / 2.0	0.3 / 1.4 / 2.5	0.3 / 1.8 / 2.8
	Heating	Min. / Nom. / Max. kW	0.3 / 1.3 / 2.0	0.3 / 1.5 / 2.4	0.3 / 1.8 / 2.9
Running Current	Cooling	Min. / Nom. / Max. A	1.3 / 5.0 / 9.2	1.3 / 6.5 / 11.1	1.3 / 8.0 / 12.6
	Heating	Min. / Nom. / Max. A	1.3 / 5.7 / 9.2	1.3 / 6.9 / 10.8	1.3 / 8.3 / 12.9
EER			4.75	4.28	4.00
COP			5.00	4.60	4.40
SEER			8.50	8.50	8.00
SCOP			4.40	4.40	4.40
Pdesign (@-10°C)		kW	5.20	5.20	5.40
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)		A+++ / A+	A+++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		217 / 1,655	253 / 1,655	308 / 1,718
Airflow Rate	Nom. m³/min		50	50	50
Sound Pressure	Cooling Nom. dB(A)		48	49	50
	Heating Nom. dB(A)		53	54	54
Sound Power	Cooling Max. dB(A)		63	64	66
Dimensions	W x H x D mm		870 x 650 x 330	870 x 650 x 330	870 x 650 x 330
Net Weight	Kg		46	46	46.2
	Type		R32	R32	R32
Refrigerant	Charge Kg		1.4	1.4	1.4
	Additional Charge g/m		20	20	20
	GWP		675	675	675
	t-CO₂ eq		0.945	0.945	0.945
Operation Range (Outdoor)	Cooling Min. / Max. °C DB		-10 / 48	-10 / 48	-10 / 48
	Heating Min. / Max. °C WB		-18 / 18	-18 / 18	-18 / 18
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Supply Cable	No. x mm²	3C x 2.5	3C x 2.5	3C x 2.5	
Transmission Cable	No. x mm²	4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker	A	20	20	20	
Piping Length Total	m	50	50	70	
Piping Length per Branch	Max. m	25	25	25	
Piping Elevation Difference	IDU - ODU Max. m	15	15	15	
	IDU - IDU Max. m	7.5	7.5	7.5	
Piping Connection	Liquid mm (inch) x No.	Ø6.35 (1/4) x 3	Ø6.35 (1/4) x 3	Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 4
	Gas mm (inch) x No.	Ø9.52 (3/8) x 3	Ø9.52 (3/8) x 3	Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 5

Notes :

- Capacities are based on the following conditions:
Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
- * : See page "Combination Table".
- Due to our policy of innovation some specifications may be changed without notification.
- At least two indoor units should be connected
- Minimum combination ratio should be more than 40%.
- This product contains fluorinated greenhouse gases (R32)



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

OUTDOOR UNITS		MU4R27 U40	MU5R30 U40
Compressor	Type	Twin Rotary	Twin Rotary
Cooling	Min. / Nom. / Max. kW	1.3 / 7.9 / 9.5	1.3 / 8.8 / 10.6
Heating	Min. / Nom. / Max. kW	1.5 / 9.1 / 10.6	1.5 / 10.1 / 12.1
Low Temperature Capacity	Heating -7°C Max. kW	6.4	7.1
Power Input*	Cooling Min. / Nom. / Max. kW	0.4 / 1.8 / 2.9	0.4 / 2.0 / 3.4
	Heating Min. / Nom. / Max. kW	0.6 / 2.1 / 3.4	0.6 / 2.2 / 3.6
Running Current	Cooling Min. / Nom. / Max. A	1.9 / 8.1 / 13.1	1.9 / 9.1 / 15.2
	Heating Min. / Nom. / Max. A	2.8 / 9.4 / 15.3	2.8 / 9.7 / 16.3
EER		4.39	4.40
COP		4.39	4.70
SEER		8.00	8.20
SCOP		4.20	4.20
Pdesign (@-10°C)	kW	7.00	7.40
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	346 / 2,333	376 / 2,467
Airflow Rate	Nom. m³/min	60	60
Sound Pressure	Cooling Nom. dB(A)	50	50
	Heating Nom. dB(A)	54	54
Sound Power	Cooling Max. dB(A)	65	66
Dimensions	W x H x D mm	950 x 834 x 330	950 x 834 x 330
Net Weight	Kg	61	61
	Type	R32	R32
Refrigerant	Charge Kg	2.3	2.6
	Additional Charge g/m	20	20
	GWP	675	675
	t-CO₂ eq	1.553	1.755
Operation Range (Outdoor)	Cooling Min. / Max. °C DB	-10 / 48	-10 / 48
	Heating Min. / Max. °C WB	-18 / 18	-18 / 18
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	No. x mm²	3C x 2.5	3C x 2.5
Transmission Cable	No. x mm²	4C x 0.75	4C x 0.75
Circuit Breaker	A	25	25
Piping Length Total	m	70	75
Piping Length per Branch	Max. m	25	25
Piping Elevation Difference	IDU - ODU Max. m	15	15
	IDU - IDU Max. m	7.5	7.5
Piping Connection	Liquid mm (inch) x No.	Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 5
	Gas mm (inch) x No.	Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 5

Notes :

- Capacities are based on the following conditions:
Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.
- * : See page "Combination Table".
- Due to our policy of innovation some specifications may be changed without notification.
- At least two indoor units should be connected
- Minimum combination ratio should be more than 40%.
- This product contains fluorinated greenhouse gases (R32)

ARTCOOL GALLERY



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
ARTCOOL Gallery	-	-	● MA09R NF1	● MA12R NF1	-	-	-



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
ARTCOOL Mirror	-	● AM07BH NSJ	○● AC09BH NSJ	○● AC12BH NSJ	-	○● AC18BH NSK	○● AC24BH NSK

Single Combination

INDOOR	MA09R NF1	MA12R NF1
Capacity	Cooling Heating	Rated W
Sound Pressure	Cooling Heating	S / L / M / H dB(A)
Sound Power	Cooling Heating	Power dB(A)
Air Flow Rate	Cooling Max. (Power) Heating	S / L / M / H m³/min m³/min L / M / H m³/min
Dehumidification Rate		l/h
Power Supply	Ø / V / Hz	1 / 220-240 / 50
Power Supply Cable	N x mm²	4C x 0.75
Dimension	mm	600 x 600 x 145
Net Weight	kg	15.0
		15.0

Single Combination

INDOOR	AM07BH NSJ	AC09BH NSJ	AC12BH NSJ
Capacity	Cooling Heating	Rated W	2,100 2,300
Sound Pressure	Cooling Heating	S / L / M / H dB(A)	19 / 26 / 32 / 36 19 / 26 / 33 / 38
Sound Power	Cooling Heating	Power dB(A)	57 57
Air Flow Rate	Cooling Max. (Power) Heating	S / L / M / H m³/min m³/min L / M / H m³/min	3.0 / 5.0 / 7.2 / 8.6 11.1 5.0 / 7.2 / 8.6
Dehumidification Rate		l/h	0.9 1.1
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	N x mm²	4C x 0.75	4C x 0.75
Dimension	mm	837 x 308 x 192	837 x 308 x 192
Net Weight	kg	9.1	9.9

INDOOR	AC18BH NSK	AC24BH NSK
Capacity	Cooling Heating	Rated W
Sound Pressure	Cooling Heating	S / L / M / H dB(A)
Sound Power	Cooling Heating	Power dB(A)
Air Flow Rate	Cooling Max. (Power) Heating	S / L / M / H m³/min m³/min L / M / H m³/min
Dehumidification Rate		l/h
Power Supply	Ø / V / Hz	1 / 220-240 / 50
Power Supply Cable	N x mm²	4C x 0.75
Dimension	mm	998 x 345 x 212
Net Weight	kg	12.8
		13.5

※ This product contains Fluorinated greenhouse gases (R32).
※ S : Sleep / L : Low / M : Medium / H : High
※ GWP : Global warming potential
※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ This product contains Fluorinated greenhouse gases (R32).
※ S : Sleep / L : Low / M : Medium / H : High
※ GWP : Global warming potential
※ t-CO₂eq : F-gas(kg)*GWP/1000
※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

AIR PURIFICATION



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Air Purification	-	-	○● AP09RT NSJ	○● AP12RT NSJ	-	-	-



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Deluxe	-	● DM07RH NSJ	○● DC09RH NSJ	○● DC12RH NSJ	-	○● DC18RH NSK	○● DC24RH NSK

Single Combination

INDOOR	AP09RT NSJ	AP12RT NSJ
Capacity	Cooling Rated W 2,500	3,500
	Heating Rated W 3,300	4,000
Sound Pressure	Cooling S / L / M / H dB(A) 21 / 27 / 35 / 42	21 / 27 / 35 / 42
	Heating L / M / H dB(A) 27 / 35 / 42	27 / 35 / 42
Sound Power	Cooling Power dB(A) 59	59
	S / L / M / H m³/min 3.0 / 4.2 / 6.6 / 10.0	3.0 / 4.2 / 6.6 / 10.0
Air Flow Rate	Cooling Max. (Power) m³/min 11.0	11.0
	Heating L / M / H m³/min 4.2 / 6.6 / 10.0	4.2 / 6.6 / 10.0
Dehumidification Rate	I/h 0.9	0.9
Power Supply	Ø / V / Hz 1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	N x mm² 4C x 0.75	4C x 0.75
Dimension	mm 857 x 348 x 189	857 x 348 x 189
Net Weight	kg 9.5	9.5

Single Combination

INDOOR	DM07RH NSJ	DC09RH NSJ	DC12RH NSJ
Capacity	Cooling Rated W 2,100	2,500	3,500
	Heating Rated W 2,300	3,200	4,000
Sound Pressure	Cooling S / L / M / H dB(A) 19 / 27 / 31 / 36	19 / 27 / 32 / 36	19 / 29 / 34 / 38
	Heating L / M / H dB(A) 27 / 31 / 36	27 / 32 / 36	29 / 34 / 39
Sound Power	Cooling Power dB(A) 56	56	56
	S / L / M / H m³/min 3.5 / 5.0 / 6.1 / 7.4	3.5 / 5.0 / 6.4 / 7.7	3.5 / 5.3 / 6.7 / 8.1
Air Flow Rate	Cooling Max. (Power) m³/min 10.1	10.1	10.1
	Heating L / M / H m³/min 5.0 / 6.1 / 7.4	5.0 / 6.4 / 7.7	5.3 / 6.7 / 8.1
Dehumidification Rate	I/h 0.9	1.1	1.2
Power Supply	Ø / V / Hz 1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	N x mm² 4C x 0.75	4C x 0.75	4C x 0.75
Dimension	mm 837 x 308 x 189	837 x 308 x 189	837 x 308 x 189
Net Weight	kg 8.3	9.1	9.1

INDOOR	DC18RH NSK	DC24RH NSK
Capacity	Cooling Rated W 5,000	6,600
	Heating Rated W 5,800	7,500
Sound Pressure	Cooling S / L / M / H dB(A) 31 / 34 / 42 / 47	31 / 34 / 42 / 47
	Heating L / M / H dB(A) 34 / 42 / 47	34 / 42 / 47
Sound Power	Cooling Power dB(A) 60	64
	S / L / M / H m³/min 8.0 / 10.5 / 13.1 / 15.5	8.0 / 10.5 / 13.1 / 16.1
Air Flow Rate	Cooling Max. (Power) m³/min 16.8	18.3
	Heating L / M / H m³/min 10.5 / 13.1 / 15.5	10.5 / 13.1 / 16.1
Dehumidification Rate	I/h 1.9	2.6
Power Supply	Ø / V / Hz 1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	N x mm² 4C x 0.75	4C x 0.75
Dimension	mm 998 x 345 x 210	998 x 345 x 210
Net Weight	kg 11.9	12.7

※ This product contains Fluorinated greenhouse gases (R32).
※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ This product contains Fluorinated greenhouse gases (R32).
※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

STANDARD PLUS



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Standard Plus	● PM05SP NSA	● PM07SP NSA	○● PC09SQ NSJ	○● PC12SQ NSJ	● PM15SP NSJ	○● PC18SQ NSK	○● PC24SQ NSK



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Standard Plus	● MJ05PC NSJ	● MJ07PC NSJ	○○ MJ09PC NSJ	○○ MJ12PC NSJ	● MJ15PC NSJ	○○ MJ18PC NSK	○○ MJ24PC NSK

Single Combination

INDOOR			PM05SP NSA	PM07SP NSA	PC09SQ NSJ	PC12SQ NSJ	PM15SP NSJ
Capacity	Cooling	Rated W	1,500	2,100	2,500	3,500	4,200
	Heating	Rated W	1,600	2,300	3,200	3,800	5,400
Sound Pressure	Cooling	S / L / M / H dB(A)	22 / 27 / 31 / 36	22 / 27 / 32 / 37	19 / 26 / 33 / 38	19 / 26 / 35 / 39	19 / 28 / 38 / 41
	Heating	L / M / H dB(A)	25 / 29 / 35	25 / 31 / 37	26 / 33 / 38	26 / 35 / 39	28 / 38 / 41
Sound Power	Cooling	Power dB(A)	57	57	57	57	57
Air Flow Rate	Cooling	S / L / M / H m³/min	2.0 / 3.5 / 5.0 / 6.3	2.0 / 3.5 / 5.3 / 6.6	3.0 / 5.0 / 7.6 / 9.1	3.0 / 5.0 / 8.1 / 9.6	3.0 / 5.4 / 8.6 / 10.0
	Max. (Power)	m³/min	11.1	11.1	11.1	11.1	11.1
	Heating	L / M / H m³/min	4.5 / 5.3 / 6.8	4.5 / 5.7 / 7.2	5.0 / 7.6 / 9.1	5.0 / 8.1 / 9.6	5.4 / 8.6 / 10.0
Dehumidification Rate		I/h	0.9	0.9	1.1	1.2	1.2
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	N x mm²	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75
Dimension	mm	754 x 308 x 189	754 x 308 x 189	837 x 308 x 189			
Net Weight	kg	7.8	7.8	8.7	8.7	8.7	8.7

INDOOR			PC18SQ NSK		PC24SQ NSK		
Capacity	Cooling	Rated W	5,000		6,600		
	Heating	Rated W	5,800		7,500		
Sound Pressure	Cooling	S / L / M / H dB(A)	31 / 34 / 42 / 47		31 / 34 / 42 / 47		
	Heating	L / M / H dB(A)	34 / 42 / 47		34 / 42 / 47		
Sound Power	Cooling	Power dB(A)	59		65		
Air Flow Rate	Cooling	S / L / M / H m³/min	8.0 / 10.5 / 13.1 / 15.5		8.0 / 10.5 / 13.1 / 16.1		
	Max. (Power)	m³/min	16.8		18.3		
	Heating	L / M / H m³/min	10.5 / 13.1 / 15.5		10.5 / 13.1 / 16.1		
Dehumidification Rate		I/h	1.9		2.6		
Power Supply	Ø / V / Hz	1 / 220-240 / 50		1 / 220-240 / 50			
Power Supply Cable	N x mm²	4C x 0.75		4C x 0.75			
Dimension	mm	998 x 345 x 210		998 x 345 x 210			
Net Weight	kg	11.9		12.7			

Single Combination

INDOOR			MJ05PC NSJ	MJ07PC NSJ	MJ09PC NSJ	MJ12PC NSJ	MJ15PC NSJ
Capacity	Cooling	Rated W	1,500	2,100	2,500	3,500	4,200
	Heating	Rated W	1,600	2,300	3,200	3,800	5,400
Sound Pressure	Cooling	S / L / M / H dB(A)	19 / 27 / 30 / 35	19 / 27 / 31 / 36	19 / 27 / 32 / 36	19 / 29 / 34 / 38	19 / 29 / 35 / 40
	Heating	L / M / H dB(A)	27 / 30 / 35	27 / 31 / 36	27 / 32 / 36	29 / 34 / 38	29 / 35 / 40
Sound Power	Cooling	Power dB(A)	57	57	57	57	57
Air Flow Rate	Cooling	S / L / M / H m³/min	3.5 / 5.0 / 5.8 / 7.1	3.5 / 5.0 / 6.1 / 7.4	3.5 / 5.0 / 6.4 / 7.7	3.5 / 5.3 / 6.7 / 8.1	3.5 / 5.4 / 7.0 / 8.7
	Max. (Power)	m³/min	10.1	10.1	10.1	10.1	10.1
	Heating	L / M / H m³/min	5.0 / 5.8 / 7.1	5.0 / 6.1 / 7.4	5.0 / 6.4 / 7.7	5.3 / 6.7 / 8.1	5.4 / 7.0 / 8.7
Dehumidification Rate		I/h	0.9	0.9	1.1	1.2	1.2
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	N x mm²	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75	4C x 0.75
Dimension	mm	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189
Net Weight	kg	8.7	8.7	8.7	8.7	8.7	8.7

INDOOR			MJ18PC NSK		MJ24PC NSK		
Capacity	Cooling	Rated W	5,000		6,600		
	Heating	Rated W	5,800		7,500		
Sound Pressure	Cooling	S / L / M / H dB(A)	31 / 34 / 42 / 47		31 / 34 / 42 / 47		
	Heating	L / M / H dB(A)	34 / 42 / 47		34 / 42 / 47		
Sound Power	Cooling	Power dB(A)	59		65		
Air Flow Rate	Cooling	S / L / M / H m³/min	8.0 / 10.5 / 13.1 / 15.5		8.0 / 10.5 / 13.1 / 16.1		
	Max. (Power)	m³/min	16.8		18.3		
	Heating	L / M / H m³/min	10.5 / 13.1 / 15.5		10.5 / 13.1 / 16.1		
Dehumidification Rate		I/h	1.9		2.6		
Power Supply	Ø / V / Hz	1 / 220-240 / 50		1 / 220-240 / 50			
Power Supply Cable	N x mm²	4C x 0.75		4C x 0.75			
Dimension	mm	998 x 345 x 210		998 x 345 x 210			
Net Weight	kg	12.0		12.0			

※ This product contains Fluorinated greenhouse gases (R32).

※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ This product contains Fluorinated greenhouse gases (R32).

※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

CEILING MOUNTED CASSETTE (1 WAY)

STANDARD 2



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Standard2	-	● MS07ET NSA	○● S09ET NSJ	○● S12ET NSJ	-	○● S18ET NSK	○● S24ET NSK



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
1 Way Cassette	-	-	● MT09R NU1	● MT11R NU1	-	-	-

Single Combination

INDOOR		MS07ET NSA	S09ET NSJ	S12ET NSJ
Capacity	Cooling	Rated W	2,100	2,500
	Heating	Rated W	2,300	3,200
Sound Pressure	Cooling	S / L / M / H dB(A)	22 / 27 / 32 / 37	19 / 26 / 33 / 38
	Heating	L / M / H dB(A)	25 / 31 / 37	26 / 33 / 38
Sound Power	Cooling	Power dB(A)	57	57
	Air Flow Rate	S / L / M / H m³/min	2.0 / 3.5 / 5.3 / 6.6	3.0 / 5.0 / 7.6 / 9.1
		Max. (Power) m³/min	10.5	11.1
		Heating L / M / H m³/min	4.5 / 5.7 / 7.2	5.0 / 7.6 / 9.1
Dehumidification Rate		I/h	0.6	1.1
Power Supply		Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable		N x mm²	4C x 0.75	4C x 0.75
Dimension		mm	754 x 308 x 189	837 x 308 x 189
Net Weight		kg	7.8	8.7

INDOOR		S18ET NSK	S24ET NSK
Capacity	Cooling	Rated W	5,000
	Heating	Rated W	5,800
Sound Pressure	Cooling	S / L / M / H dB(A)	31 / 34 / 42 / 47
	Heating	L / M / H dB(A)	34 / 42 / 47
Sound Power	Cooling	Power dB(A)	59
	Air Flow Rate	S / L / M / H m³/min	8.0 / 10.5 / 13.1 / 15.5
		Max. (Power) m³/min	16.8
		Heating L / M / H m³/min	10.5 / 13.1 / 15.5
Dehumidification Rate		I/h	1.9
Power Supply		Ø / V / Hz	1 / 220-240 / 50
Power Supply Cable		N x mm²	4C x 0.75
Dimension		mm	998 x 345 x 210
Net Weight		kg	11.9
			12.7

1 Way Cassette

INDOOR		MT09R NU1	MT11R NU1
Capacity	Cooling / Heating Nom. kW	2.6 / 2.9	3.5 / 3.9
Power Input	Nom. W	20	20
Running Current	Nom. A	0.2	0.2
Power Supply	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate	H / M / L m³/min	7.5 / 7.3 / 6.8	8.1 / 7.4 / 7.0
Sound Pressure	Cooling H / M / L dB(A)	36 / 34 / 32	37 / 36 / 33
Sound Power	Cooling Max. dB(A)	54	57
Dehumidification Rate	I/h	1.1	1.2
Dimensions	Body W x H x D mm	860 x 132 x 450	860 x 132 x 450
Net Weight	Body kg	13.5	13.5
Piping Connection	Liquid mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
Decoration Panel	Model	PT-UAHW0 / PT-UAHGO / PT-UPHGO	PT-UAHW0 / PT-UAHGO / PT-UPHGO

※ This product contains Fluorinated greenhouse gases (R32).
※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

CEILING CONCEALED DUCT

RESIDENTIAL

MULTI SPLIT

CEILING MOUNTED CASSETTE (4 WAY)



	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
4 Way Cassette	● MT06R NRO	● MT08R NRO	○○ CT09F NRO	○○ CT12F NRO	-	○○ CT18F NQ0	○○ CT24F NBO



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Mid / High Static Pressure	-	-	-	-	-	○○ CM18F N10	○○ CM24F N10

4 Way Cassette

INDOOR			MT06R NRO	MT08R NRO	CT09F NRO
Capacity	Cooling / Heating	Nom. kW	1.5 / 1.6	2.1 / 2.3	2.6 / 2.9
Power Input	Nom.	W	20	20	22
Running Current	Nom.	A	0.40	0.40	0.40
Power Supply	Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate	H / M / L	m³/min	7.5 / 6.0 / 5.0	7.5 / 6.0 / 5.0	8.5 / 7.0 / 6.0
Sound Pressure	Cooling	H / M / L dB(A)	31 / 27 / 24	31 / 27 / 24	36 / 33 / 30
Sound Power	Cooling	Max. dB(A)	48	48	52
Dehumidification Rate		I/h	-	-	0.9
Dimensions	Body	W x H x D mm	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570
Net Weight	Body	kg	11.7	11.7	12.4
Piping Connection	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Model		PT-QCHW0	PT-QCHW0	PT-QAGW0
Decoration Panel	Color		Morning Fog (9001)	Morning Fog (9001)	White (9003)
	Dimensions	W x H x D mm	620 x 34 x 620	620 x 34 x 620	620 x 35 x 620
	Weight	kg	3	3	2.9

INDOOR			CT12F NRO	CT18F NQ0	CT24F NBO
Capacity	Cooling / Heating	Nom. kW	3.5 / 3.9	5.3 / 5.8	6.7 / 7.5
Power Input	Nom.	W	24	26	26
Running Current	Nom.	A	0.40	0.40	0.60
Power Supply	Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate	H / M / L	m³/min	9.5 / 8.0 / 7.0	13.0 / 12.0 / 11.0	17.0 / 15.0 / 13.0
Sound Pressure	Cooling	H / M / L dB(A)	38 / 35 / 32	41 / 39 / 39	38 / 36 / 34
Sound Power	Cooling	Max. dB(A)	52	57	53
Dehumidification Rate		I/h	1.4	2.0	2.7
Dimensions	Body	W x H x D mm	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840
Net Weight	Body	kg	12.4	13.9	21.1
Piping Connection	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas	mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Model		PT-QAGW0	PT-QAGW0	PT-AAGW0
Decoration Panel	Color		White (9003)	White (9003)	White (9003)
	Dimensions	W x H x D mm	620 x 35 x 620	620 x 35 x 620	950 x 35 x 950
	Weight	kg	2.9	2.9	7.1

※ Dual vane is applied to 24k

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

CEILING CONCEALED DUCT



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Low Static Pressure	-	-	○○ CL09F N50	○○ CL12F N50	-	○○ CL18F N60	-

Duct (Low Static)

INDOOR			CL09F N50	CL12F N50	CL18F N60
Capacity	Cooling / Heating	Nom. kW	2.5 / 3.2	3.4 / 4.0	5.0 / 5.8
Power Input	H / M / L	W	21 / 15 / 13	21 / 15 / 13	100 / 90 / 80
Running Current	H / M / L	A	0.21 / 0.16 / 0.14	0.21 / 0.16 / 0.14	0.43 / 0.39 / 0.34
Power Supply	Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate	H / M / L	m³/min	11.5 / 9.5 / 8.0	11.5 / 9.5 / 8.0	15.0 / 12.0 / 10.0
Sound Pressure	H / M / L	dB(A)	35 / 30 / 27	35 / 30 / 27	34 / 31 / 29
Sound Power Level	Rated	dB(A)	55	55	56
Dehumidification Rate		l/h	0.5	0.9	1.7
Dimensions	W x H x D mm		900 x 190 x 460	900 x 190 x 460	1,100 x 190 x 460
Net Weight	kg		18.0	18.0	20.9
Piping Connections	Liquid Side Gas Side	mm (inch) mm (inch)	Ø 6.35 (1/4) Ø 9.52 (3/8)	Ø 6.35 (1/4) Ø 9.52 (3/8)	Ø 6.35 (1/4) Ø 12.7 (1/2)
External static pressure	Min. - Max.	Pa (mmAq)	0 ~ 5 (0 ~ 50)	0 ~ 5 (0 ~ 50)	0 ~ 5 (0 ~ 50)



LG participates in the ECP programme
for EUROVENT VRF program.
Check ongoing validity of certification
www.eurovent-certification.com

kBtu/H	5	7	9	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Low Static Pressure	-	-	-	-	-	-	○○ CL24F N30

Duct (Low Static)

INDOOR			CL24F N30
Capacity	Cooling / Heating	Nom. kW	6.8 / 7.5
Power Input	H / M / L	W	150 / 130 / 110
Running Current	H / M / L	A	0.65 / 0.56 / 0.47
Power Supply	Ø / V / Hz		1 / 220-240 / 50
Air Flow Rate	H / M / L	m³/min	20.0 / 16.0 / 12.0
Sound Pressure	H / M / L	dB(A)	39 / 35 / 32
Sound Power Level	Rated	dB(A)	58
Dehumidification Rate		l/h	2.5
Dimensions	W x H x D mm		1,100 x 190 x 700
Net Weight	kg		26.0
Piping Connections	Liquid Side Gas Side	mm (inch) mm (inch)	Ø 9.52 (3/8) Ø 15.88 (5/8)
External static pressure	Min. - Max.	Pa (mmAq)	0 ~ 5 (0 ~ 50)

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

COMBINATION TABLE



MU2R15

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY				INPUT(W)					
	MIN.		RATED		MAX.									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	3,000	0.88	5,000	1.47	5,750	1.69	226	381	477
	7				7	4,200	1.23	7,000	2.05	8,050	2.36	303	540	683
	9				9	5,400	1.58	9,000	2.64	10,350	3.03	408	676	864
	12				12	7,200	2.11	12,000	3.52	13,800	4.04	540	926	1,176
2 UNIT	5	5			10	6,000	1.76	10,000	2.93	11,500	3.37	414	682	889
	5	7			12	7,200	2.11	12,000	3.52	13,800	4.04	486	833	1,106
	5	9			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	7			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	9			16	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	5	12			17	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	9	9			18	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	12			19	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	9	12			21	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	HEATING													
OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY				INPUT(W)					
	MIN.		RATED		MAX.									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	3,300	0.97	5,500	1.61	6,050	1.77	235	380	472
	7				7	5,040	1.48	8,400	2.46	9,240	2.71	355	604	721
	9				9	6,480	1.90	10,800	3.17	11,880	3.48	454	784	949
	12				12	7,920	2.32	13,200	3.87	14,520	4.26	554	969	1,185
2 UNIT	5	5			10	6,600	1.93	11,000	3.22	12,100	3.55	408	706	854
	5	7			12	7,920	2.32	13,200	3.87	14,520	4.26	498	872	1,066
	5	9			14	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	7			14	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	9			16	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	5	12			17	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	9	9			18	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	12			19	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	9	12			21	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	HEATING													



MU2R17

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY				INPUT(W)					
	MIN.		RATED		MAX.									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	3,000	0.88	5,000	1.47	5,750	1.69	226	381	477
	7				7	4,200	1.23	7,000	2.05	8,050	2.36	303	540	683
	9				9	5,400	1.58	9,000	2.64	10,350	3.03	408	676	864
	12				12	7,200	2.11	12,000	3.52	13,800	4.04	540	926	1,176
2 UNIT	5	5			10	6,000	1.76	10,000	2.93	11,500	3.37	414	682	889
	5	7			12	7,200	2.11	12,000	3.52	13,800	4.04	486	833	1,106
	5	9			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	7			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	9			16	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	5	12			17	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	9	9			18	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	12			19	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	9	12			21	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	HEATING													
OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY				INPUT(W)					
	MIN.		RATED		MAX.									

COMBINATION TABLE



MU3R19

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY				INPUT(W)					
	MIN.		RATED		MAX.									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	3,600	1.06	5,000	1.47	6,000	1.76	288	363	571
	7				7	4,200	1.23	7,000	2.05	8,400	2.46	319	478	645
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	378	595	847
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	478	822	1,139
	15				15	8,520	2.50	15,000	4.40	17,040	4.99	573	1,003	1,356
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	747	1,302	1,827
	5	5			10	7,200	2.11	10,000	2.93	12,000	3.52	350	532	788
	5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	350	669	991
	5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215
	7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215
2 UNIT	7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	469	991	1,467
	5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	532	1,083	1,603
	9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	7	12			19	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	5	15			20	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	9	12			21	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	7	15			22	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	5	18			23	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	9	15			24	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	12	12			24	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	7	18			25	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	9	18			27	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	12	15			27	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	5	24			29	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	12	18			30	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
	15	15			30	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040
3 UNIT	5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	422	837	1,239
	5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	481	1,013	1,500
	5	5	9		19	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	7	7		19	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	7	9		21	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	7	7	7		21	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	5	12		22	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	9	9		23	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	7	7	9		23	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	7	12		24	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	5	15		25	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	7	9	9		25	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	9	12		26	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	7	7	12		26	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	7	15		27	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	9	9	9		27	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	7	9	12		28	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	5	18		28	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	9	15		29	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	12	12		29	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	7	7	15		29	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	5	7	18		30	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918
	9	9	12		30	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918



MU3R19

OPERATION	HEATING</
-----------	-----------

COMBINATION TABLE



MU3R21

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY						INPUT(W)			
					MIN.		RATED		MAX.					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	3,600	1.06	5,000	1.47	6,000	1.76	288	363	571
	7				7	4,200	1.23	7,000	2.05	8,400	2.46	319	478	645
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	378	595	847
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	478	822	1,139
	15				15	8,520	2.50	15,000	4.40	17,040	4.99	573	1,003	1,356
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	747	1,302	1,827
2 UNIT	5	5			10	7,200	2.11	10,000	2.93	12,000	3.52	350	532	788
	5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	350	669	991
	5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215
	7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215
	7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	469	991	1,467
	5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	532	1,083	1,603
	9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	1,890
	7	12			19	11,400	3.34	19,000	5.57	22,800	6.68	669	1,290	2,064
	5	15			20	12,000	3.52	20,000	5.86	24,000	7.03	669	1,406	2,249
	9	12			21	12,600	3.69	21,000	6.15	24,150	7.08	743	1,530	2,450
	7	15			22	12,600	3.69	21,000	6.15	24,150	7.08	743	1,530	2,450
	5	18			23	12,600	3.69	21,000	6.15	24,150	7.08	743	1,530	2,450
	9	15			24	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	12	12			24	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	7	18			25	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	9	18			27	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	12	15			27	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	5	24			29	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	12	18			30	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	15	15			30	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	7	24			31	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	9	24			33	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
	15	18			33	12,600	3.69	21,000	6.15	25,000	7.33	743	1,530	2,450
3 UNIT	5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	422	837	1,239
	5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	481	1,013	1,500
	5	5	9		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1,212	1,940
	5	7	7		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1,212	1,940
	5	7	9		21	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	7	7		21	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	5	12		22	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	9	9		23	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	7	9		23	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	7	12		24	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	5	15		25	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	9	9		25	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	9	12		26	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	7	12		26	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	7	15		27	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	9	9	9		27	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	9	12		28	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	5	18		28	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	9	15		29	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	12	12		29	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	7	15		29	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	5	7	18		30	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	9	9	12		30	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301
	7	9	15		31	12,600	3.69	21,000	6.15	25,000	7.33	682	1,438	2,301</td

COMBINATION TABLE



MU4R25

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				COOLING						INPUT(W)			
					TOTAL CAPACITY				INPUT(W)					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	3,600	1.06	5,000	1.47	6,000	1.76	288	363	571
	7				7	4,200	1.23	7,000	2.05	8,400	2.46	319	478	645
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	378	595	847
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	478	822	1,139
	15				15	8,520	2.50	15,000	4.40	17,040	4.99	573	1,003	1,356
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	747	1,302	1,827
	5	5			10	7,200	2.11	10,000	2.93	12,000	3.52	350	532	788
	5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	350	669	991
	5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215
	7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215
2 UNIT	7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	469	991	1,467
	5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	532	1,083	1,603
	9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	1,749
	7	12			19	11,400	3.34	19,000	5.57	22,800	6.68	669	1,290	1,909
	5	15			20	12,000	3.52	20,000	5.86	24,000	7.03	669	1,406	2,080
	9	12			21	12,600	3.69	21,000	6.15	24,150	7.08	743	1,530	2,264
	7	15			22	13,200	3.87	22,000	6.45	25,300	7.42	743	1,638	2,425
	5	18			23	13,800	4.04	23,000	6.74	26,450	7.75	821	1,752	2,593
	9	15			24	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	12	12			24	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	7	18			25	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	9	18			27	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	12	15			27	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	5	24			29	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	12	18			30	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	15	15			30	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	7	24			31	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	9	24			33	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	15	18			33	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	18	18			36	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	12	24			36	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
	15	24			39	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770
3 UNIT	5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	422	837	1,239
	5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	481	1,013	1,500
	5	5	9		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1,212	1,794
	5	7	7		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1,212	1,794
	5	7	9		21	12,600	3.69	21,000	6.15	25,200	7.39	682	1,438	2,128
	7	7	7		21	12,600	3.69	21,000	6.15	25,200	7.39	682	1,438	2,128
	5	5	12		22	13,200	3.87	22,000	6.45	26,400	7.74	731	1,540	2,279
	5	9	9		23	13,800	4.04	23,000	6.74	27,600	8.09	731	1,647	2,437
	7	7	9		23	13,800	4.04	23,000	6.74	27,600	8.09	731	1,647	2,437
	5	7	12		24	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	5	15		25	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	7	9	9		25	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	9	12		26	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	7	15		27	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	9	9	9		27	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	7	9	12		28	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	5	18		28	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	9	15		29	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	12	12		29	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
4 UNIT	7	7	15		29	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603
	5	7	9		30	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,60

COMBINATION TABLE



MU4R25

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY						INPUT(W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	4,000	1.17	5,500	1.61	6,325	1.85	279	384	589
	7				7	5,040	1.48	8,400	2.46	9,650	2.83	342	579	743
	9				9	6,480	1.90	10,800	3.17	12,420	3.64	483	757	997
	12				12	7,920	2.32	13,200	3.87	15,180	4.45	537	954	1,234
	15				15	9,900	2.90	16,500	4.84	18,975	5.56	688	1,189	1,593
	18				18	11,880	3.48	19,800	5.80	22,770	6.67	845	1,483	1,978
	24				24	15,240	4.47	25,400	7.44	26,670	7.82	1,101	1,840	2,327
	5	5			10	7,200	2.11	12,000	3.52	14,400	4.22	329	598	861
	5	7			12	8,640	2.53	14,400	4.22	17,280	5.06	430	904	1,301
	5	9			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1,360
2 UNIT	7	7			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1,360
	7	9			16	11,520	3.38	19,200	5.63	23,040	6.75	540	1,118	1,610
	5	12			17	12,240	3.59	20,400	5.98	24,480	7.17	598	1,319	1,899
	9	9			18	12,960	3.80	21,600	6.33	25,920	7.60	660	1,430	2,059
	7	12			19	13,680	4.01	22,800	6.68	27,360	8.02	725	1,543	2,221
	5	15			20	14,400	4.22	24,000	7.03	28,800	8.44	764	1,662	2,393
	9	12			21	15,120	4.43	25,200	7.39	29,000	8.50	793	1,749	2,518
	7	15			22	15,840	4.64	26,400	7.74	29,000	8.50	867	1,836	2,644
	5	18			23	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	9	15			24	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	12	12			24	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	7	18			25	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	9	18			27	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	12	15			27	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	5	24			29	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	12	18			30	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	15	15			30	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	7	24			31	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	9	24			33	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	15	18			33	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	18	18			36	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	12	24			36	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
3 UNIT	15	24			39	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	5	5	5		15	10,800	3.17	18,000	5.28	21,600	6.33	497	946	1,363
	5	5	7		17	12,240	3.59	20,400	5.98	24,480	7.17	551	1,118	1,610
	5	5	9		19	13,680	4.01	22,800	6.68	27,360	8.02	725	1,419	2,044
	5	7	7		19	13,680	4.01	22,800	6.68	27,360	8.02	725	1,419	2,044
	5	7	9		21	15,120	4.43	25,200	7.39	30,240	8.86	730	1,610	2,319
	7	7	7		21	15,120	4.43	25,200	7.39	30,240	8.86	730	1,610	2,319
	5	5	12		22	15,840	4.64	26,400	7.74	31,000	9.09	798	1,697	2,444
	5	9	9		23	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	7	7	9		23	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	7	12		24	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	5	15		25	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	7	9	9		25	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	9	12		26	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	7	7	12		26	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	7	15		27	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	7	9	9		27	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	9	15		28	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	5	18		28	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	9	15		29	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647
	5	12	12		29	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647

COMBINATION TABLE

RESIDENTIAL

MULTI SPLIT

COMBINATION TABLE



MU4R27

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY						INPUT(W)			
					MIN.		RATED		MAX.					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	4,500	1.32	5,000	1.47	6,000	1.76	416	418	612
	7				7	4,800	1.41	7,000	2.05	8,400	2.46	416	494	663
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	416	617	861
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	494	846	1,153
	15				15	8,520	2.50	14,200	4.16	17,040	4.99	592	1,029	1,395
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	769	1,328	1,804
	24				24	14,400	4.22	24,000	7.03	25,500	7.47	1,029	1,815	2,536
	5	5			10	6,000	1.76	10,000	2.93	12,000	3.52	378	623	853
	5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	444	761	1,038
	5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,228
2 UNIT	7	9			14	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,228
	5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	646	1,121	1,537
	9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	692	1,195	1,623
	7	12			19	11,400	3.34	19,000	5.57	22,800	6.68	715	1,270	1,740
	5	15			20	12,000	3.52	20,000	5.86	24,000	7.03	761	1,347	1,829
	9	12			21	12,600	3.69	21,000	6.15	25,200	7.39	808	1,423	2,012
	7	15			22	13,200	3.87	22,000	6.45	26,400	7.74	855	1,475	2,154
	5	18			23	13,800	4.04	23,000	6.74	27,600	8.09	879	1,554	2,351
	9	15			24	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,505
	12	12			24	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,505
3 UNIT	7	18			25	15,000	4.40	25,000	7.33	30,000	8.79	975	1,755	2,721
	9	18			27	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	12	15			27	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	5	24			29	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	12	18			30	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	15	15			30	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	7	24			31	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	9	24			33	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	15	18			33	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	18	18			36	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
4 UNIT	12	24			36	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	15	24			39	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891
	5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	522	916	1,258
	5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	607	1,054	1,445
	5	5	9		19	11,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,636
	5	7	7		19	11,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,636
	5	7	9		21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,891
	7	7	7		21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,891
	5	5	12		22	13,200	3.87	22,000	6.45	26,400	7.74	804	1,387	2,025
	5	9	9		23	13,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,219
5 UNIT	7	7	9		23	13,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,219
	5	7	12		24	14,400	4.22	24,000	7.03	28,800	8.44	871	1,535	2,379
	5	5	15		25	15,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,605
	7	9	9		25	15,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,605
	5	9	12		26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,784
	7	7	12		26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,784
	5	7	15		27	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784
	9	9	9		27	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784
	7	9	12		28	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784
	5	5	18		28	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784
6 UNIT	5	9	15		29	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784
	7	12	12		29	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784

COMBINATION TABLE

RESIDENTIAL

MULTI SPLIT

COMBINATION TABLE



MU4R27

OPERATION	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)				TOTAL CAPACITY						INPUT(W)			
					MIN.		RATED		MAX.					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5				5	5,000	1.47	5,500	1.61	6,325	1.85	610	610	714
	7				7	5,400	1.58	8,400	2.46	9,660	2.83	610	636	825
	9				9	6,480	1.90	10,800	3.17	12,420	3.64	610	826	1,077
	12				12	7,920	2.32	13,200	3.87	15,180	4.45	583	1,021	1,338
	15				15	9,900	2.90	16,500	4.84	18,975	5.56	744	1,279	1,744
	18				18	11,880	3.48	19,800	5.80	22,770	6.67	909	1,577	2,133
	24				24	15,240	4.47	25,400	7.44	26,670	7.82	1,192	2,077	2,538
	5	5			10	7,200	2.11	12,000	3.52	14,400	4.22	451	773	1,081
	5	7			12	8,640	2.53	14,400	4.22	17,280	5.06	541	940	1,337
	5	9			14	10,080	2.95	16,800	4.92	20,160	5.91	656	1,112	1,571
2 UNIT	7	7			14	10,080	2.95	16,800	4.92	20,160	5.91	656	1,112	1,571
	7	9			16	11,520	3.38	19,200	5.63	23,040	6.75	749	1,289	1,844
	5	12			17	12,240	3.59	20,400	5.98	24,480	7.17	796	1,392	1,968
	9	9			18	12,960	3.80	21,600	6.33	25,920	7.60	844	1,471	2,094
	7	12			19	13,680	4.01	22,800	6.68	27,360	8.02	892	1,577	2,222
	5	15			20	14,400	4.22	24,000	7.03	28,800	8.44	940	1,657	2,352
	9	12			21	15,120	4.43	25,200	7.39	30,240	8.86	989	1,766	2,568
	7	15			22	15,840	4.64	26,400	7.74	31,680	9.28	1,038	1,848	2,811
	5	18			23	16,560	4.85	27,600	8.09	33,120	9.71	1,112	1,960	3,127
	9	15			24	17,280	5.06	28,800	8.44	34,100	9.99	1,100	2,045	3,384
3 UNIT	12	12			24	17,280	5.06	28,800	8.44	34,100	9.99	1,100	2,045	3,384
	7	18			25	18,000	5.28	30,000	8.79	34,100	9.99	1,147	2,194	3,384
	9	18			27	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	12	15			27	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	5	24			29	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	12	18			30	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	15	15			30	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	7	24			31	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	9	24			33	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	15	18			33	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
4 UNIT	18	18			36	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	12	24			36	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	15	24			39	18,600	5.45	31,000	9.09	34,100	9.99	1,194	2,157	3,384
	5	5	5		15	10,800	3.17	18,000	5.28	21,600	6.33	660	1,140	1,590
	5	5	7		17	12,240	3.59	20,400	5.98	24,480	7.17	748	1,309	1,850
	5	5	9		19	13,680	4.01	22,800	6.68	27,360	8.02	838	1,482	2,089
	5	7	7		19	13,680	4.01	22,800	6.68	27,360	8.02	838	1,482	2,089
	5	7	9		21	15,120	4.43	25,200	7.39	30,240	8.86	930	1,660	2,414
	7	7	7		21	15,120	4.43	25,200	7.39	30,240	8.86	930	1,660	2,414
	5	5	12		22	15,840	4.64	26,400	7.74	31,680	9.28	976	1,738	2,590
3 UNIT	5	9	9		23	16,560	4.85	27,600	8.09	33,120	9.71	1,046	1,842	2,767
	7	7	9		23	16,560	4.85	27,600	8.09	33,120	9.71	1,046	1,842	2,767
	5	7	12		24	17,280	5.06	28,800	8.44	34,560	10.13	1,093	1,922	2,951
	5	5	15		25	18,000	5.28	30,000	8.79	34,720	10.18	1,140	2,063	2,998
	7	9	9		25	18,000	5.28	30,000	8.79	34,720	10.18	1,140	2,063	2,998
	5	9	12		26	18,720	5.49	31,200	9.14	34,720	10.18	1,188	2,177	2,998
	7	7	12		26	18,720	5.49	31,200	9.14	34,720	10.18	1,188	2,177	2,998
	5	7	15		27	18,600	5.45	31,000	9.09	34,720	10.18	1,188	2,177	2,998
	9	9	9		27	18,600	5.45	31,000	9.09	34,720	10.18	1,188	2,177	2,998
	5	5	18		28	18,600	5.45	31,000	9.09	34,720	10.18	1,188	2,177	2,998
4 UNIT	5	9	15		29	18,600	5.45	31,000	9.09	34,720	10.18	1,188	2,177	2,998
	5	12	12		29	18,600	5.45	31,000	9.09					

COMBINATION TABLE



MU5R30

OPERATION	COOLING					TOTAL CAPACITY			INPUT(W)						
	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)					MIN.		RATED		MAX.		INPUT(W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
1 UNIT	5	4,500	1.32	5,000	1.47	6,000	1.76	416	418	629					
	7	4,800	1.41	7,000	2.05	8,400	2.46	416	494	681					
	9	5,400	1.58	9,000	2.64	10,800	3.17	416	617	884					
	12	7,200	2.11	12,000	3.52	14,400	4.22	494	846	1,184					
	15	8,520	2.50	14,200	4.16	17,040	4.99	592	1,029	1,432					
	18	10,800	3.17	18,000	5.28	21,600	6.33	769	1,328	1,852					
	24	14,400	4.22	24,000	7.03	25,500	7.47	1,029	1,815	2,604					
	5	6,000	1.76	10,000	2.93	12,000	3.52	378	623	876					
	5	7,200	2.11	12,000	3.52	14,400	4.22	444	761	1,066					
	5	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,261					
2 UNIT	7	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,261					
	7	9,600	2.81	16,000	4.69	19,200	5.63	601	1,047	1,461					
	5	12	10,200	2.99	17,000	4.98	20,400	5.98	646	1,121	1,578				
	9	9	10,800	3.17	18,000	5.28	21,600	6.33	692	1,195	1,667				
	7	12	11,400	3.34	19,000	5.57	22,800	6.68	715	1,270	1,787				
	5	15	12,000	3.52	20,000	5.86	24,000	7.03	761	1,347	1,878				
	9	12	12,600	3.69	21,000	6.15	25,200	7.39	808	1,423	2,066				
	7	15	13,200	3.87	22,000	6.45	26,400	7.74	855	1,475	2,211				
	5	18	13,800	4.04	23,000	6.74	27,600	8.09	879	1,554	2,414				
	9	15	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,572				
	12	12	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,572				
	7	18	15,000	4.40	25,000	7.33	30,000	8.79	975	1,755	2,794				
	9	18	16,200	4.75	27,000	7.91	32,400	9.50	1,047	2,011	3,213				
	12	15	16,200	4.75	27,000	7.91	32,400	9.50	1,047	2,011	3,213				
	5	24	17,400	5.10	29,000	8.50	33,000	9.67	1,145	2,284	3,341				
	12	18	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	15	15	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	7	24	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	9	24	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	15	18	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	18	18	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	12	24	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	15	24	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
	18	24	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341				
3 UNIT	24	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341					
	5	9	19,000	5.57	22,800	6.68	26,400	7.74	855	1,475	2,211				
	5	7	19,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,680				
	5	7	19,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,680				
	21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,942					
	7	7	21,200	3.87	22,000	6.45	26,400	7.74	804	1,387	2,079				
	5	9	21,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,278				
	7	7	23,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,278				
	24	14,400	4.22	24,000	7.03	28,800	8.44	871	1,535	2,442					
	5	15	25,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,674				
	7	9	25,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,674				
	26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,859					
	7	7	26,000	4.57	26,000	7.62	31,200	9.14	962	1,767	2,859				
	27	16,200	4.75	27,000	7.91	32,400	9.50	984	1,890	3,120					
	9	9	27,000	4.75	27,000	7.91	32,400	9.50	984	1,890	3,120				
	28	16,800	4.92	28,000	8.21	33,600	9.85	1,030	2,028	3,327					
	5	18	28,000	4.92	28,000	8.21	33,600	9.85	1,030	2,028	3,327				
	29	17,400	5.10	29,000	8.50	33,600	9.85	1,077	2,173	3,327					
	5	12	29,000	5.10	29,000	8.50	33,600	9.85	1,077	2,173	3,327				
	7														

COMBINATION TABLE



MU5R30

OPERATION	COOLING					TOTAL CAPACITY						INPUT(W)			
	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)					MIN.		RATED		MAX.					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
5 UNIT	5	5	5	5	5	25	15,000	4.40	25,000	7.33	30,000	8.79	841	1,517	2,300
	5	5	5	5	7	27	16,200	4.75	27,000	8.50	32,400	9.50	906	1,701	2,645
	5	5	5	5	9	29	17,400	5.10	29,000	8.50	34,800	10.20	993	1,897	3,026
	5	5	5	7	7	29	17,400	5.10	29,000	8.50	34,800	10.20	993	1,897	3,026
	5	5	5	7	9	31	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	7	7	7	31	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	5	12	32	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	9	9	33	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	9	9	33	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	7	7	33	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
5 UNIT	5	5	7	7	12	34	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	5	15	35	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	7	9	9	35	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	7	9	35	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	7	7	7	7	7	35	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	5	18	38	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	7	12	38	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	9	15	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	12	12	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	7	7	15	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
5 UNIT	5	5	9	9	9	37	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	7	7	7	7	9	37	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	5	18	38	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	7	12	38	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	9	9	15	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	7	12	12	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	9	12	12	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	7	7	15	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	7	7	18	39	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	9	9	9	41	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
5 UNIT	5	5	9	18	42	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	5	12	12	42	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	7	18	42	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	9	12	42	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	7	7	7	9	12	42	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	5	15	43	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	7	12	43	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	7	7	15	43	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	12	12	43	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	7	15	43	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
5 UNIT	5	5	9	9	9	43	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	12	15	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	9	9	12	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	12	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260	
	5	7	7	9	12	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	12	12	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	7	7	7	15	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260
	5	5	12	15	44	18,000	5.28	30,000	8.79	36,000	10.55	1,037	2,000	3,260</td	

COMBINATION TABLE

RESIDENTIAL

MULTI SPLIT

COMBINATION TABLE



MU5R30

OPERATION	HEATING					TOTAL CAPACITY						INPUT(W)			
	COMBINATION OF INDOOR UNIT (kBtu/h CLASS)					MIN.		RATED		MAX.					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	TOTAL	Btu/h	kW	Btu/h	kW	Btu/h	kW	MIN.	RATED	MAX.
3 UNIT	7	18	18			43	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	7	12	24			43	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	5	15	24			44	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	9	18	18			45	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	9	12	24			45	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	12	15	18			45	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	15	15	15			45	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	7	15	24			46	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	5	18	24			47	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	9	15	24			48	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	12	18	18			48	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	12	12	24			48	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	15	15	18			48	20,700	6.07	34,500	10.11	38,640	11.32	1,333	2,566	3,602
	5	5	5	5		20	14,400	4.22	24,000	7.03	28,800	8.44	840	1,480	2,100
	5	5	5	7		22	15,840	4.64	26,400	7.74	31,680	9.28	927	1,651	2,470
	5	5	5	9		24	17,280	5.06	28,800	8.44	34,560	10.13	1,038	1,826	2,861
	5	5	7	7		24	17,280	5.06	28,800	8.44	34,560	10.13	1,038	1,826	2,861
	5	5	7	9		26	18,720	5.49	31,200	9.14	37,440	10.97	1,128	2,068	3,349
	5	7	7	7		26	18,720	5.49	31,200	9.14	37,440	10.97	1,128	2,068	3,349
	5	5	5	12		27	19,440	5.70	32,400	9.50	38,640	11.32	1,174	2,230	3,524
	5	5	9	9		28	20,160	5.91	33,600	9.85	38,640	11.32	1,220	2,356	3,524
	5	7	7	9		28	20,160	5.91	33,600	9.85	38,640	11.32	1,220	2,356	3,524
	7	7	7	7		28	20,160	5.91	33,600	9.85	38,640	11.32	1,220	2,356	3,524
	5	5	7	12		29	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	5	15		30	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	9	9		30	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	9	12		31	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	7	12		31	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	7	15		32	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	7	7	9	9		32	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	9	9	9		32	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	5	18		33	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	9	12		33	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	7	7	7	12		33	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	9	15		34	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	12	12		34	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	7	15		34	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	7	9	9	9		34	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	7	18		35	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	9	9	12		35	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	7	7	9	12		35	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	9	15		36	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	12	12		36	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	7	7	7	15		36	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	9	9	9	9		36	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	9	18		37	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	5	12	15		37	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	3,524
	5	7	7	18		37	20,700	6.07	34,500	10.11	38,640	11.32	1,267	2,487	

OUTDOOR UNITS

R410A MULTI SPLIT



OUTDOOR			MU5M40 U44
Compressor	Type		Scroll
Capacity*	Cooling	Min. / Nom. / Max. kW	1.3 / 11.2 / 14.7
	Heating	Min. / Nom. / Max. kW	1.5 / 12.5 / 16.0
Low Temperature Capacity	Heating -7°C	Max. kW	11.0
Power Input*	Cooling	Min. / Nom. / Max. kW	0.4 / 3.3 / 5.5
	Heating	Min. / Nom. / Max. kW	0.4 / 3.2 / 5.6
Running Current*	Cooling	Min. / Nom. / Max. A	1.8 / 14.9 / 24.9
	Heating	Min. / Nom. / Max. A	1.9 / 14.5 / 25.4
EER			3.40
COP			3.90
SEER			7.10
SCOP			4.00
Pdesign (@-10°C)		kW	8.90
Season Energy Label	Cooling / Heating (A+++ to D Scale)		A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh	552 / 3,114
Airflow Rate	Nom.	m³/min	80
Sound Pressure Level	Cooling	Nom. dB(A)	53
	Heating	Nom. dB(A)	55
Sound Power Level	Cooling	Max. dB(A)	67
Dimensions	W x H x D	mm	950 x 834 x 330
Net Weight		kg	73
Refrigerant	Type		R410A
	Charge	kg	3.4
	Additional Charge	g/m	20
	GWP		2087.5
	t-CO ₂ eq		7.098
Operation Range (Outdoor)	Cooling	Min. / Max. °C DB	-10 / 48
	Heating	Min. / Max. °C WB	-25 / 18
Power Supply		Ø / V / Hz	1 / 220-240 / 50
Power Supply Cable		No. x mm²	3C x 4.0
Transmission Cable		No. x mm²	4C x 0.75
Circuit Breaker		A	40
Piping Length Total		m	85
Piping Length per Branch	Max.	m	25
Piping Elevation Difference	IDU - ODU	Max. m	15
	IDU - IDU	Max. m	7.5
Piping Connection	Liquid	mm (inch) x No.	Ø6.35 (1/4) x 5
	Gas	mm (inch) x No.	Ø9.52 (3/8) x 5

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

Note : 1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. * : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected.

5. Minimum combination capacity rate should be more than 40%.

6. This product contains fluorinated greenhouse gases. (R410A)

OUTDOOR UNITS



R410A



R410A

3Phase

OUTDOOR			FM40AH U34	FM48AH U34	FM56AH U34
Compressor	Type	-	Scroll	Scroll	Scroll
Cooling	Min. / Nom. / Max.	kW	2.8 / 12.3 / 15.4	3.3 / 14.1 / 17.0	4.0 / 15.5 / 18.5
Capacity*	Heating	Min. / Nom. / Max.	kW	3.1 / 13.5 / 16.2	3.7 / 16.0 / 17.3
Low Temperature Capacity	Heating	Max.	kW	12.5	14.5
Power Input*	Cooling	Min. / Nom. / Max.	kW	0.82 / 2.42 / 4.90	0.96 / 3.12 / 5.30
	Heating	Min. / Nom. / Max.	kW	0.89 / 2.87 / 5.10	1.06 / 3.76 / 5.40
Running Current*	Cooling	Min. / Nom. / Max.	A	3.7 / 11.0 / 22.2	4.4 / 14.1 / 24.0
	Heating	Min. / Nom. / Max.	A	4.0 / 13.0 / 23.1	4.8 / 17.0 / 24.5
EER				5.08	4.51
COP				4.70	4.25
SEER				7.40	7.20
SCOP				4.20	4.20
Pdesign(@-10°C)		kW		8.6	9.5
Seasonal Energy Label (A++ to E Scale)	Cooling / Heating	-	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	981 / 2,867	1,167 / 3,167	1,348 / 3,167
Air Flow Rate	Nom.	m³/min x No.	110	110	110
Sound Pressure Level	Cooling	Nom.	dB(A)	51	53
	Heating	Nom.	dB(A)	53	55
Sound Power Level	Cooling	Max.	dB(A)	69	71
	Heating	Max.	dB(A)	70	72
Dimensions	W x H x D	mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight		kg	87	87	87
	Type	-	R410A	R410A	R410A
Refrigerant	Charge	kg	4,200	4,200	4,200
	Additional Charging Volume	g/m	20	20	20
	GWP (Global Warming Potential)	-	2,087.5	2,087.5	2,087.5
	t-CO ₂ eq	-	8.768	8.768	8.768
Operation Range (Outdoor)	Cooling	Min. / Max.	°C DB	-10 / 48	-10 / 48
	Heating	Min. / Max.	°C WB	-25 / 18	-25 / 18
Power Supply		Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable		No. x mm ²	3C x 4.0	3C x 4.0	3C x 4.0
Transmission Cable	ODU-BD	No. x mm ²	4C x 1.25	4C x 1.25	4C x 1.25
	BD-IDU	No. x mm ²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker		A	40	40	40
	Total Piping (Main+Total Branch)	m	125	135	145
Max Piping Length	Main Piping	m	55	55	55
	Total Branch Piping	m	70	80	90
	Each Branch Piping	m	15	15	15
Piping Elevation Difference	IDU-ODU	Max.	m	30	30
	IDU-IDU	Max.	m	15	15
Piping Connections	Liquid	mm (inch) x No.	Ø9.52 x 1	Ø9.52 x 1	Ø9.52 x 1
	Gas	mm (inch) x No.	Ø19.05 x1	Ø19.05 x1	Ø19.05 x1

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

Note : 1. Capacities are based on the following conditions:

Cooling :- Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
Heating :- Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. * : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected.

5. Minimum combination capacity rate should be more than 40%.

6. This product contains fluorinated greenhouse gases. (R410A)

OUTDOOR			FM41AH U34	FM49AH U34	FM57AH U34
Compressor	Type	-	Scroll	Scroll	Scroll
Cooling	Min. / Nom. / Max.	kW	2.8 / 12.3 / 15.4	3.3 / 14.1 / 17.0	4.0 / 15.5 / 18.5
Capacity*	Heating	Min. / Nom. / Max.	kW	3.1 / 13.5 / 16.2	3.7 / 16.0 / 17.3
Low Temperature Capacity	Heating	Max.	kW	12.5	14.5
Power Input*	Cooling	Min. / Nom. / Max.	kW	0.82 / 2.42 / 4.90	0.96 / 3.12 / 5.30
	Heating	Min. / Nom. / Max.	kW	0.89 / 2.87 / 5.10	1.06 / 3.76 / 5.40
Running Current*	Cooling	Min. / Nom. / Max.	A	1.2 / 3.6 / 7.4	1.4 / 4.7 / 8.0
	Heating	Min. / Nom. / Max.	A	1.3 / 4.3 / 7.7	1.6 / 5.7 / 8.1
EER				5.08	4.51
COP				4.70	4.25
SEER				7.40	7.20
SCOP				4.20	4.20
Pdesign(@-10°C)		kW		8.6	9.5
Seasonal Energy Label (A++ to E Scale)	Cooling / Heating	-	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	981 / 2,867	1,167 / 3,167	1,348 / 3,167
Air Flow Rate	Nom.	m³/min x No.	110	110	110
Sound Pressure Level	Cooling	Nom.	dB(A)	51	53
	Heating	Nom.	dB(A)	53	55
Sound Power Level	Cooling	Max.	dB(A)	69	71
	Heating	Max.	dB(A)	70	72
Dimensions	W x H x D	mm	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight		kg	87	87	87
	Type	-	R410A	R410A	R410A
Refrigerant	Charge	kg	4,200	4,200	4,200
	Additional Charging Volume	g/m	20	20	20
	GWP (Global Warming Potential)	-	2,087.50	2,087.50	2,087.50
	t-CO ₂ eq	-	8.768	8.768	8.768
Operation Range (Outdoor)	Cooling	Min. / Max.	°C DB	-10 / 48	-10 / 48
	Heating	Min. / Max.	°C WB	-25 / 18	-25 / 18
Power Supply		Ø / V / Hz	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50
Power Supply Cable		No. x mm ²	5C x 2.5	5C x 2.5	5C x 2.5
Transmission Cable	ODU-BD	No. x mm ²	4C x 1.25	4C x 1.25	4C x 1.25
	BD-IDU	No. x mm ²	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker		A	20	20	20
	Total Piping (Main+Total Branch)	m	125	135	145
Max Piping Length	Main Piping	m	55	55	55
	Total Branch Piping	m	70	80	90
	Each Branch Piping	m	15	15	15
Piping Elevation Difference	IDU-ODU	Max.	m	30	30
	IDU-IDU	Max.	m	15	15
Piping Connections	Liquid	mm (inch) x No.	Ø9.52 x 1	Ø9.52 x 1	Ø9.52 x 1
	Gas	mm (inch) x No.	Ø19.05 x1	Ø19.05 x1	Ø19.05 x1

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

Note : 1. Capacities are based on the following conditions:

Cooling :- Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
Heating :- Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. * : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected.


5. Minimum combination capacity rate should be more than 40%.

6. This product contains fluorinated greenhouse gases. (R410A)

OUTDOOR UNITS

Optimized Air Flow for Cooling & Heating


During cooling operation, the vane adjusts upwards to direct air flow toward the ceiling. During heating operation, the vane directs the air flow toward the floor to balance out the room temperature. A wireless controller is included with the indoor console unit.

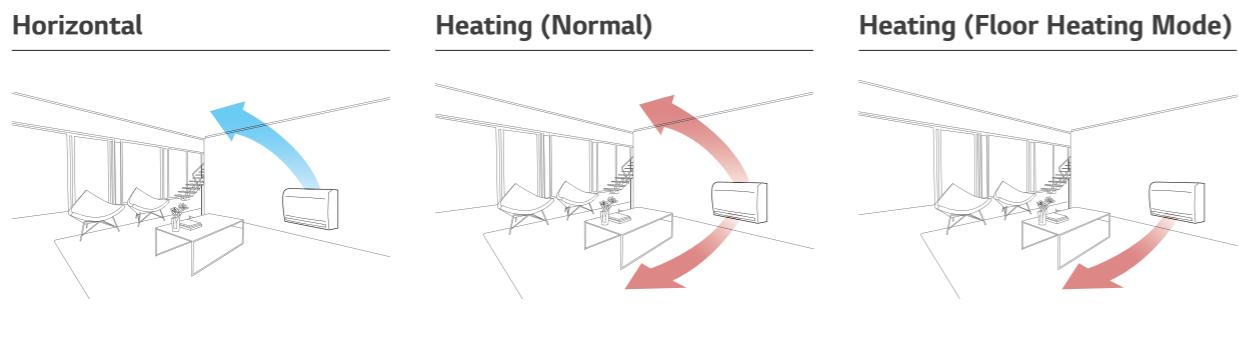

	CAPACITY (kW)	2.6	3.5	5.3
Console		CQ09 NAO	CQ12 NAO	CQ18 NAO

Quick Floor Heating

Console air conditioners offer a fast and powerful performance. Using the floor heating mode, console air conditioners provide faster floor heating and help to reach the desired temperature quickly.

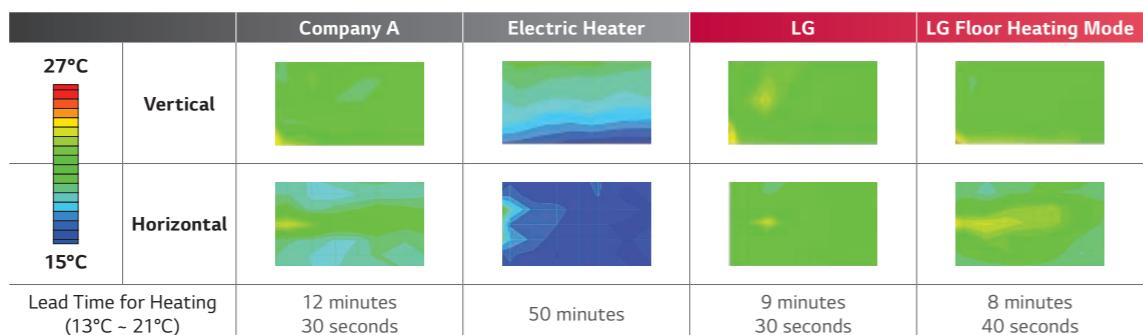

※ Test Condition : Target Temp 23°C, Indoor Room : 13°C~, Outdoor Room : 7°C

5-Step Vane Control

There are 5 different stages to control air flow direction.



Console

INDOOR				CQ09 NAO
Capacity	Cooling / Heating	Nom.	kW	2.6 / 2.9
Power Input		Nom.	W	20
Running Current		Nom.	A	0.6
Power Supply		Ø / V / Hz		1 / 220-240 / 50
Air Flow Rate	H / M / L	m³/min		8.5 / 6.7 / 5.0
Sound Pressure	Cooling	H / M / L	dB(A)	38 / 32 / 27
Sound Power	Cooling	Max.	dB(A)	53
Dehumidification Rate		I/h		1.2
Dimensions	Body	W x H x D	mm	700 x 600 x 210
Net Weight	Body		kg	14.0
Piping Connection	Liquid	mm (inch)		Ø6.35 (1/4)
	Gas	mm (inch)		Ø9.52 (3/8)

INDOOR				CQ12 NAO	CQ18 NAO
Capacity	Cooling / Heating	Nom.	kW	3.5 / 3.9	5.3 / 5.8
Power Input		Nom.	W	20	40
Running Current		Nom.	A	0.6	0.7
Power Supply		Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50
Air Flow Rate	H / M / L	m³/min		9.0 / 6.9 / 5.2	10.1 / 8.6 / 7.2
Sound Pressure	Cooling	H / M / L	dB(A)	39 / 32 / 27	44 / 39 / 35
Sound Power	Cooling	Max.	dB(A)	56	60
Dehumidification Rate		I/h		1.4	2.3
Dimensions	Body	W x H x D	mm	700 x 600 x 210	700 x 600 x 210
Net Weight	Body		kg	14.0	14.0
Piping Connection	Liquid	mm (inch)		Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas	mm (inch)		Ø9.52 (3/8)	Ø12.7 (1/2)

※ R32 Console compatible for both SCAC and MULTI will be 2nd half of 2021.

Note : 1. Capacities are based on the following conditions :

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB
Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. Definition of Power Input Nominal conditions - Performance tested under EN14511
3. Due to our policy of innovation some specifications may be changed without notification.
4. This product contains fluorinated greenhouse gases. (R410A)

Cassette Panel

The Independent Vane Operation makes desired and comfortable air flow.




Key Features

- Independent vane operation uses separate motors, making it possible to control all 1, 2, and 4 vanes independently.
- The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain pipe and refrigerant pipes.

Compact and Stylish Design

- New 4 way cassette panel adapted unibody shape and matching with the ceiling.
- Panel size is fit into the ceiling tile.

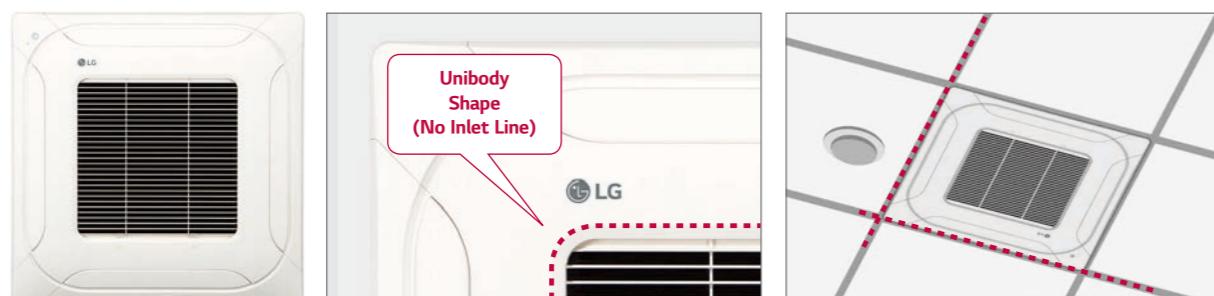

Specification

Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)			Applied Model Capacity (kW)*						
					Dimension (mm)			Single Split		Multi Split		Multi V		
					W	H	D	R32	R410A	R32	R410A	R32	R410A	
4 Way	PT-QCHW0	Grill	Morning Fog (RAL 9001)	X	3.0	620	35	620	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
	PT-UQC	Grill	Morning Fog (RAL 9001)	X	3.0	700	22	700	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
	PT-QAGW0	Grid	White (RAL 9003)	X	2.9	620	35	620	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
2 Way	PT-USC	Grill	Morning Fog (RAL 9001)	X	4.7	1,100	28	690					2.8-7.1	2.8-7.1
	PT-UAHGO	Grill	White (RAL 9003)	O	3.9	1,160	34	500			2.6-3.5	2.6-3.5	2.2-3.6	2.2-3.6
1 Way	PT-UAHWO	Grill	White (RAL 9003)	X	3.3	1,100	34	500			2.6-3.5	2.6-3.5	2.2-3.6	2.2-3.6
	PT-UPHGO	Grill	White (RAL 9003)	O	4.1	1,160	34	500			2.6-3.5	2.6-3.5	2.2-3.6	2.2-3.6

* Based on cooling capacity
※ O : Applied, - : Not applied

Dual Vane Cassette Panel



Model Name

PT-AAGW0
PT-AFGW0

Key Features

Model	Function					
	Dual Vane	Wi-Fi	Floor Temperature Sensor	Air Purification	Elevating Grille	Human Detection Sensor
PT-AAGW0	O	Optional	Optional	X	X	Optional
PT-AFGW0	O	Optional	Optional	Optional (Dust Sensor, Tact Switch)	X	Optional

Specification


Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)		
					W	H	D
PT-AAGW0	Grid	White (RAL 9003)	-	7.1	950	35	950
PT-AFGW0	Grid	White (RAL 9003)	-	7.5	950	35	950

Air Purification Kit

Model	Image	Model name	Dielectric Dust collecting filter	Photocatalytic Deodorizing filter	HVPS	Ionizer
Air cleaning kit		PTAHMPO		0	0	0
		PTAHTP0		0	0	0

Cassette Cover

Cover in case of exposed cassette installation.

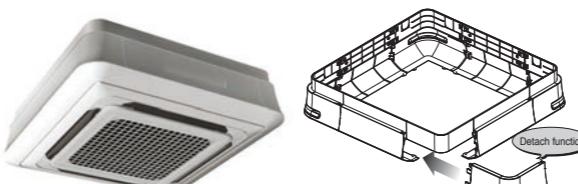

Model Name

PTDCM / PTDCQ

Applied Products


4 Way Cassette (for chassis TB, TQ, TR)

Included Parts

- Cover A, Cover B
- Cover C, Cover D
- Screws
- Installation Manual




Cover A (4 units)




Cover B (4 units)



Screw (32 units)



Cover C (4 units)



Cover D (4 units)



Installation Manual

Specification

Model	Front Panel	Weight (kg)		Dimensions (mm)		
		NET	Gross	W	H	D
PTDCM	PT-AAGW0 PT-AFGW0	5.9	8.8	1,157	1,157	268
PTDCQ	PT-UQC	5.0	7.2	907	907	268
	TQ	5.0	7.2	907	907	310

ACCESSORIES

LG Wi-Fi Modem

Control conditioners by using internet devices as Android or iOS smartphones.



PWFMD200

Features

- User can enjoy anytime, anywhere access with Wi-Fi equipped device through LG's ThinQ mobile app.
- This allows the user to access the unit remotely to switch unit on or off before or after leaving the vicinity.
- LG's exclusive Home Appliances control app (LG ThinQ) is available.
- Simple operation for various functions.
 - On / Off
 - Reservation (Sleep, Weekly On / Off)
 - Operation Mode
 - Energy Monitoring²⁾
 - Current / Set Temperature
 - Filter Management
 - Fan Speed
 - Error Check
 - Vane Control¹⁾
 - Air Purify³⁾

Model Name	PWFMD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	System Air Conditioner ³⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

Note : 1. Functionality may be different according to each IDU model.


2. User interface of application shall be revised for its design and contents improvement.

3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.


1) Vane Control may not be possible according to the type of Indoor unit.

2) LG Centralized controller and PDI installation is required for this function.

3) For the compatibility with Indoor unit, please contact regional LG office.

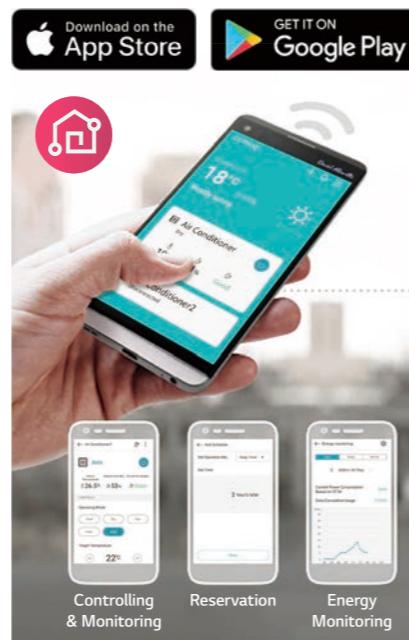

Overview

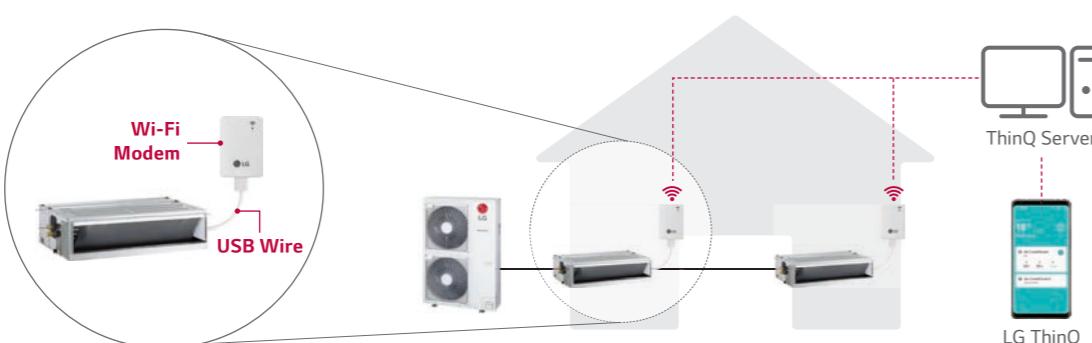

※ Search "LG ThinQ" on Google market or Appstore then download the app.
※ Internet service with Wi-Fi connection has to be available.

Standard Wired Remote Controller



Standard III
PREMTB100 Standard III
PREMTBB10



Standard II
PREMTB001 Standard II
PREMTBB01

Model Name	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01
Operation Mode	On / Off, Fan Speed Control, Temperature Setting	
Mode Change	Cooling, Heating, Auto, Dehumidification, Fan	
Auto Swing / Vane Control	•	•
Reservation	Simple, Sleep, On / Off, Weekly, Holiday	
Time Display	•	•
Electrical Failure Compensation	•	•
Child Lock	•	•
Operation Status LED	•	•
Indoor Temperature Display	•	•
Wireless Remote Controller Receiver	-	•
Size (W x H x D, mm)	120 x 120 x 16	120 x 121 x 16
Backlight	•	•

Remote Controller



PQWRHQOFDB

※ Only some of controllers have back light feature.

PI 485



PMNFP14A1

Power : Single phase AC 220V 50/60Hz

Max. no. of the indoor units that can be connected : 64 UNITS

Model applied : RAC / Multi / Single / Therma V

※ Refer to each product PDB for applicable models.

Dry Contact



PDRYCB000 PDRYCB400



PDRYCB320 PDRYCB500

※ Refer to each product PDB for applicable models.

Model	PDRYCB000	PDRYCB400	PDRYCB320	PDRYCB500
Contact Point	1 Control Point	2 Control Point	8 Control Point	Modbus RTU
Power Input	AC 220V from outside power source	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PCB	DC 5V & 12 V from indoor unit PDB
Voltage / Non Voltage Input	-	•	•	-
On / Off Control	•	•	•	•
Lock / Unlock	•	•	•	•
Fan Speed Setting	-	-	•	•
Thermo Off	-	•	•	-
Energy Saving	-	•	-	-
Temperature Setting	-	•	•	•
Error Monitoring	•	•	•	•
Operation Monitoring	•	•	•	•

ACCESSORIES**Distributor Box**

Easy installation using the range of Distributor Boxes. Various distributors can make much easier installation for any sites.



PMBD3620 (2 Indoors) PMBD3630 (3 Indoors) PMBD3640 (4 Indoors)

Features

- Distribution of refrigerant to various indoor units.
- 3 models (2, 3, 4 Indoor Units)
- EEV included
- Controlling PCB inside the unit
- Internally insulated (Prevents any chances of drainage)
- Flare joints for easy and clean installation
- Compact design (Low height)
- Flexible installation

**Specification**

Model Name	PMBD3620	PMBD3630	PMBD3640
Connectable Indoor Units	1 ~ 2	1 ~ 3	1 ~ 4
Capacity	5k / 7k / 9k / 12k / 18k / 24k	5k / 7k / 9k / 12k / 18k / 24k	5k / 7k / 9k / 12k / 18k / 24k
Power Source	Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Consumption	W	10	10
Running Current	A	0.05	0.05
Dimensions	W x H x D mm (inch)	302 x 143 x 252 (11.9 x 5.6 x 9.9)	302 x 143 x 252 (11.9 x 5.6 x 9.9)
Net Weight	kg/lb	4.8 / 10.6	4.9 / 10.8
Piping Connection (To Outdoor Unit)	Liquid mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)
Piping Connection (To Indoor Unit)	Liquid mm (inch)	Ø6.35 (1/4) x 2EA	Ø6.35 (1/4) x 3EA
	Gas mm (inch)	Ø9.52 (3/8) x 2EA	Ø9.52 (3/8) x 3EA
Accessories	Hanger (Bracket) EA	4	4
	Screw EA	8	8
	Manual EA	1	1

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

Note : 1. The piping connection must be suit the piping sizes of the indoor unit which will be connected.

(If need, use the connector which is included in the indoor unit)

2. The BD should be installed inside the building.

Y Branch and Branch Kit

Easy installation using the range of Distributor Boxes. Various distributors can make much easier installation for any sites.





PMBL5620 (2 units)



PMBL1203F0 (3 units)

Features

- Y Branch and Branch kit make Multi FDX installation much easier.
- Y Branch and Branch kit for both gas and liquid are provided.
- Insulation material is also provided for covering the branches.

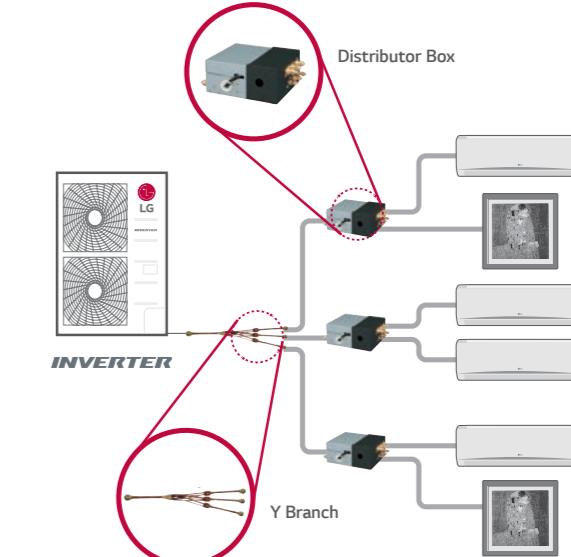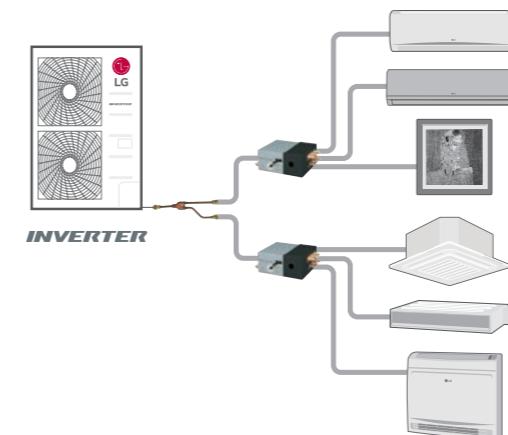Application**Accessory Model Name**

Model Name	No. of Branch distribution units	Applicable Model	Specification	
			Gas	Liquid
PMBL5620	2 Units	1Ø, 3Ø	Ø19.05 Ø9.52	Ø9.52 Ø19.05
PMBL1203F0	3 Units	1Ø, 3Ø	Ø19.05	Ø9.52 Ø9.52